



MFK70-135 3.040 €



MFK70-180 3.703 €

Cubetas GN y perfiles divisorios NO incluidos en el precio, ver página 387
 GN containers and dividers NOT included in price, see page 387

| mod. | rango range °C | largo length (mm) | alto height (mm) | fondo depth (mm) | estantes shelves | pares guías slides sets | volumen capacity (L) | voltaje voltage | refrigerante refrigerant | potencia frig. frig. power W | potencia power W |
|-----------|----------------------|-------------------------|------------------------|------------------------|---------------------|----------------------------|----------------------------|--------------------|-----------------------------|------------------------------------|------------------------|
| MFK70-135 | 0°C +8°C | 1345 | 850 | 700 | 2 | 2 | 255 | 230V-50Hz | R134a* | 304 | 322 |
| | | | | | | | | | R290 | 502 | 764 |
| MFK70-180 | 0°C +8°C | 1795 | 850 | 700 | 3 | 3 | 399 | 230V-50Hz | R134a* | 485 | 511 |
| | | | | | | | | | R290 | 845 | 490 |

* no disponible mercado UE - not for EU market

Características técnicas y constructivas sujetas a variación sin previo aviso.


- Exterior en acero inox AISI-304
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Encimera inox con capacidad cubetas GN 1/3-100 (ver detalle)
- Cúpula acristalada sobre alojamiento cubetas, con estante intermedio
- Estantes interiores de alambre en acero plastificado, regulables en altura, sobre guías de acero inox
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Unidad condensadora ventilada y extraíble
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 32°C ambiente

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- AISI-304 stainless steel worktop, capacity for GN-1/3-100 containers (see detail)
- Glass cover with shelf
- Shelves made of plasticized steel wire, height adjustable by stainless steel slides
- AISI -304 adjustable legs, 135 to 210 mm
- Removable and fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating temperature, 32°C ambient

| OPCIONES | OPTIONS | € |
|--|---|-----------|
| parrilla adicional GN-1/1 | additional grill GN-1/1 | 26 € |
| set adicional guías GN-1/1 | additional set GN-1/1 guides | 28 € |
| perfil adicional GN-divisorio encimera | additional GN-divider profile for worktop | 11 € |
| motor lado izquierdo | left side motor | 69 € |
| cerradura puerta inox | SS door lock | 23 € |
| set 4 ruedas | set 4 wheels | 93 € |
| set 6 ruedas | set 6 wheels | 139 € |
| registrador de alarmas HACCP | HACCP alarm recorder | consultar |
| 230V 60Hz / 115V 60Hz | 230V 60Hz / 115V 60Hz | consultar |
| cambio R290 por R134a | change R290 for R134a | 0 € |

Encimeras, alojamientos para cubetas y cubiertas, se pueden fabricar a medida.
 Worktops, container fits and covers, can be customized.

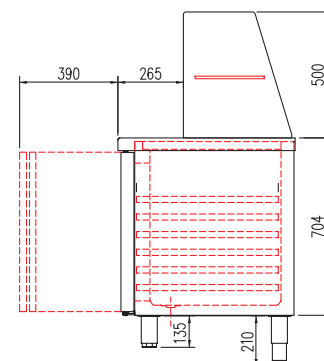




MFK70-180

evaporador central
double fan evaporator



MFK70-180
Vista trasera
Back side view

MFK70-135

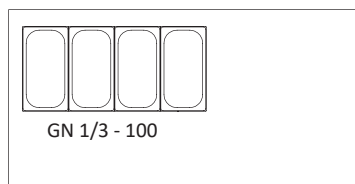

MFK70-180

