



AP-750



AP-1002

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	cajones containers 40x60	pares guías slides sets	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	clase 2015/1094 EN16825
AP-750	-5°C -1°C	680	2130	850	7	7	645	230V-50Hz	R134a*	485	491	5 40°C 40%
									R290	845	434	5 40°C 40%
AP-1002	-5°C -1°C	680	2130	850	14	14	1404	230V-50Hz	R134a*	684	677	5 40°C 40%
									R290	845	479	5 40°C 40%


*opcional - optional

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Cerradura con llave, de serie
- Contrapuerta inox embutida
- Luz interior LED
- Interior con guías de acero inox, regulables en altura cada 60 mm para parrillas, bandejas o contenedores 60x40
- Pies en tubo de acero inox ajustables en altura 135 - 200 mm
- Cuadro de mandos elevable
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- **75 mm** aislamiento perimetral
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo: 40°C

We reserve the right to change specifications without prior notice.

- *AISI-304 stainless steel exterior, rear side galvanized panel*
- *AISI-304 stainless steel interior, stamped bottom and rounded corners*
- *Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense*
- *APRV: double glazed door on aluminium frame and LED lighting*
- *Key lock as standard*
- *Inner side of doors by stamped steel*
- *LED lighting*
- *Capacity for 60x40 shelves, containers or trays by stainless steel slides, 60 mm height adjustable*
- *AISI -304 adjustable legs, 135 to 200 mm*
- *Liftable control panel*
- *Fan assisted condenser unit*
- *Fan assisted evaporator, with epoxi anticorrosion coating*
- *Evaporator fan stops when door is opened*
- *Automatic evaporation of defrost water*
- *40 Kg/m³ density polyurethane, zero ODP and GWP*
- *75 mm perimetral insulation*
- *Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption*
- *Operating temperature: 40°C*

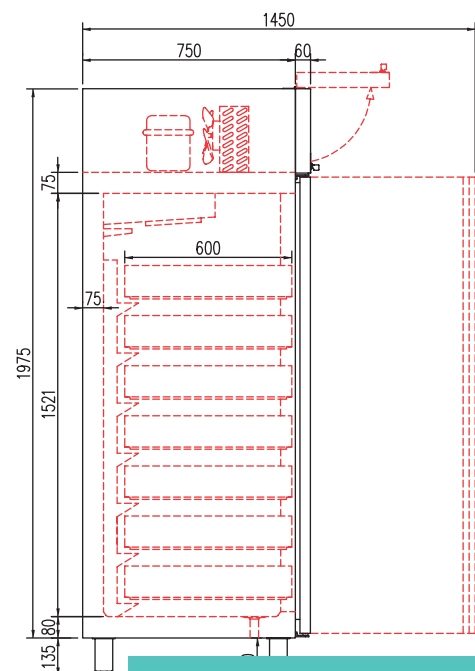

OPCIONES	OPTIONS	€
cajón plástico 60x40x12	60x40x12 plastic drawer	37 €
set adicional guías	additional set guides	20 €
set 4 ruedas	set 4 wheels	80 €
set 6 ruedas	set 6 wheels	120 €
registrador de alarmas HACCP	HACCP alarm recorder	consultar
respaldo inox	SS rear side	consultar
tropicalizado 43°C	tropicalized 43 °C	consultar
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	consultar
cambio R290 por R134a	change R290 for R134a	0 €