



ACRV-751
ACCV-751



ACRV-1302
ACCV-1302



ACRV-2003
ACCV-2003

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2015/1094 EN16825	clase 2015/1094 EN16825
ACRV-751	-2°C +8°C	680	2160	735	4	505	230V-50Hz	R290	502	260	D	5 40°C 40%
ACCV-751	-20°C -15°C	680	2160	735	4	505	230V-50Hz	R290	606	560	E	3 25°C 60%
ACRV-1302	-2°C +8°C	1370	2160	735	8+4	1201	230V-50Hz	R290	845	396	E	4 30°C 55%
ACCV-1302	-20°C -15°C	1370	2160	735	8+4	1201	230V-50Hz	R290	907	957	E	3 25°C 60%
ACRV-2003	-2°C +8°C	2055	2160	735	12+8	1852	230V-50Hz	R290	1702	943	E	4 30°C 55%
ACCV-2003	-20°C -15°C	2055	2160	735	12+8	1852	230V-50Hz	R290	1814	1726	E	3 25°C 6-%

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo y fondo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible (751), con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- ACRV: Doble cristal + LEDs, ACCV: Triple cristal + LEDs
- Estantes parrilla reforzados, de acero plastificado
- Pies en tubo de acero inox ajustables en altura 135- 200 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- **70 mm** aislamiento en costados
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 32°C


We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, except rear side and base
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense (751)
- ACRV: Double glazed door + LEDs, ACCV: Triple glazed door + LEDs
- Reinforced shelves made of plasticized steel
- AISI -304 adjustable legs, 135 to 200 mm
- Control panel and engine ventilation shelf, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- **70 mm** sides insulation
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32°C

OPCIONES

OPTIONS

parrilla adicional	additional shelf
parrilla intermedia adicional	extra middle shelf
barras carniceras	meat bars
set 4 ruedas	set 4 wheels
set 5 ruedas	set 5 wheels
set 6 ruedas	set 6 wheels
cerradura puerta cristal	glass door lock
respaldo inox	SS rear side
tropicalizado 43°C	tropicalized 43 °C
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz
APPC	HACCP

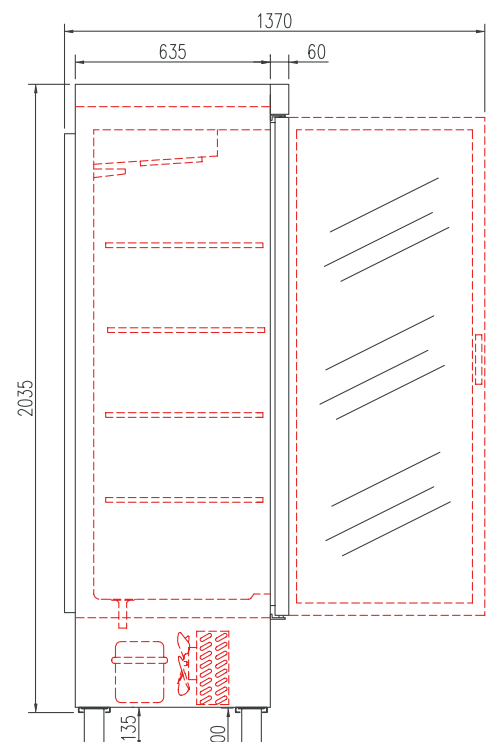



ACRV-1302

Serigrafiado perimetral
 Perimetral serigraphy



ACRV-751