


 ACR-751
ACC-751

 ACR-752
ACC-752

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2015/1094 EN16825	clase 2015/1094 EN16825
ACR-750	-2°C +8°C	680	2160	735	3	505	230V-50Hz	R134a*	245	253	E	5 40°C 40%
								R290	502	232	C	5 40°C 40%
ACC-750	-20°C -15°C	680	2160	735	3	505	230V-50Hz	R290	606	553	E	4 30°C 55%
								R449A*	452	620	E	4 30°C 55%


*opcional - optional

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Luz interior LED
- Estantes parrilla reforzados, de acero plastificado
- Pies en tubo de acero inox ajustables en altura 135 - 200 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- **70 mm** aislamiento en costados
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- Interior LED lighting
- Reinforced shelves made of plasticized steel
- AISI -304 adjustable legs, 135 to 200 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- **70 mm** sides insulation
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption

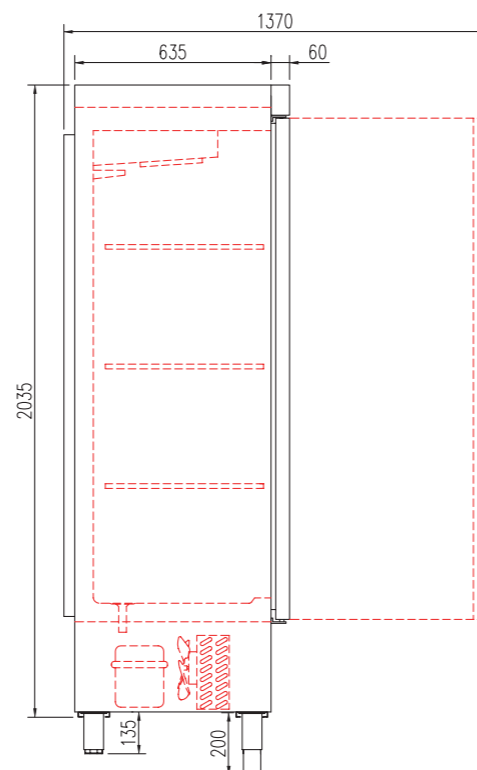

OPCIONES	OPTIONS
parrilla adicional	additional grill
parrilla intermedia adicional	additional intermediate rack
barras carniceras	meat bars
set 4 ruedas	set 4 wheels
set 6 ruedas	set 6 wheels
cerradura puerta inox	SS door lock
cerradura puerta cristal	glass door lock
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	SS rear side
tropicalizado 43°C	tropicalized 43 °C
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz
cambio R290 por R134a	change R290 for R134a
cambio R290 por R449A	change R290 for R449A

all photos must be considered as a reference - fotografías no contractuales



ACR-751





ACR-1302
ACC-1302

ACR-1303
ACC-1303

ACR-1304
ACC-1304

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2015/1094 EN16825	clase 2015/1094 EN16825
ACR-1300	-2°C +8°C	1370	2160	735	6+3	1201	230V-50Hz	R134a*	485	442	E	5 40°C 40%
								R290	845	373	D	5 40°C 40%
ACC-1300	-20°C -15°C	1370	2160	735	6+3	1201	230V-50Hz	R290	907	952	E	4 30°C 55%
								R449A*	1042	990	E	4 30°C 55%


*opcional - optional

Características técnicas y constructivas sujetas a variación sin previo aviso.

We reserve the right to change specifications without prior notice.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Luz interior LED
- Estantes parrilla reforzados, de acero plastificado
- Pies en tubo de acero inox ajustables en altura 135 - 200 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- **70 mm** aislamiento en costados
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- Interior LED lighting
- Reinforced shelves made of plasticized steel
- AISI -304 adjustable legs, 135 to 200 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- **70 mm** sides insulation
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption

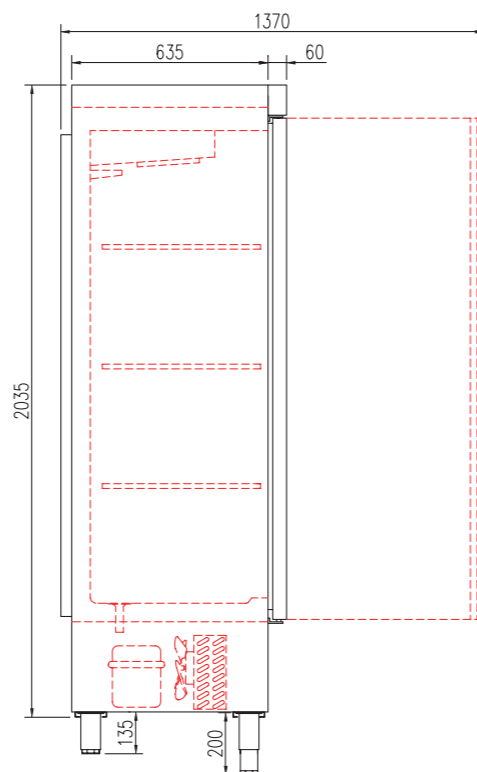

OPCIONES	OPTIONS
parrilla adicional	additional grill
parrilla intermedia adicional	additional intermediate rack
barras carniceras	meat bars
set 4 ruedas	set 4 wheels
set 6 ruedas	set 6 wheels
cerradura puerta inox	SS door lock
cerradura puerta cristal	glass door lock
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	SS rear side
tropicalizado 43°C	tropicalized 43 °C
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz
cambio R290 por R134a	change R290 for R134a
cambio R290 por R449A	change R290 for R449A

all photos must be considered as a reference - fotografías no contractuales



ACR-1304





ACR-2003
ACC-2003

ACR-2004
ACC-2004

ACR-2005
ACC-2005

ACR-2006
ACC-2006

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2015/1094 EN16825	clase 2015/1094 EN16825
ACR-2000	-2°C +8°C	2055	2160	735	9+6	1852	230V-50Hz	R290	1702	897	E	5 40°C 40%
								R449A*	1215	894	E	5 40°C 40%
ACC-2000	-20°C -15°C	2055	2160	735	9+6	1852	230V-50Hz	R290	1814	1680	E	4 30°C 55%
								R449A*	1630	1594	E	4 30°C 55%


*opcional - optional

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Luz interior LED
- Estantes parrilla reforzados, de acero plastificado
- Pies en tubo de acero inox ajustables en altura 135 - 200 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- 70 mm aislamiento en costados
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- Interior LED lighting
- Reinforced shelves made of plasticized steel
- AISI -304 adjustable legs, 135 to 200 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- 70 mm sides insulation
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption

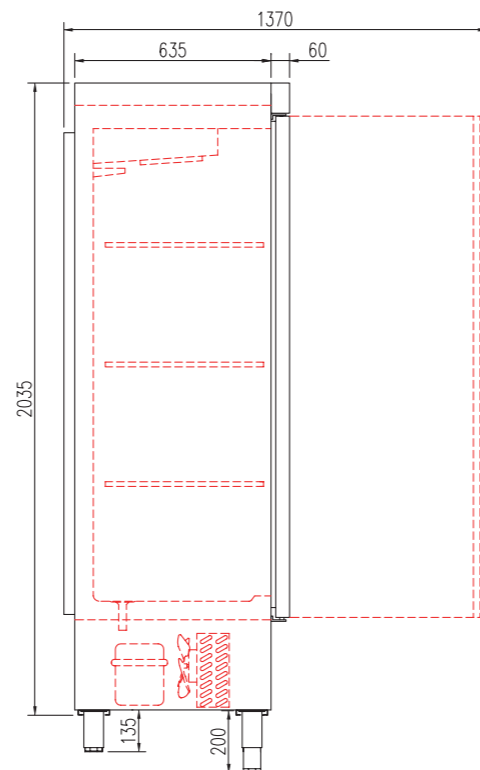

OPCIONES	OPTIONS
parrilla adicional	additional grill
parrilla intermedia adicional	additional intermediate rack
barras carniceras	meat bars
set 4 ruedas	set 4 wheels
set 6 ruedas	set 6 wheels
cerradura puerta inox	SS door lock
cerradura puerta cristal	glass door lock
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	SS rear side
tropicalizado 43°C	tropicalized 43 °C
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz
cambio R290 por R134a	change R290 for R134a
cambio R290 por R449A	change R290 for R449A

all photos must be considered as a reference - fotografías no contractuales



ACC-2006

