



CSR-751-S	CSR-752-S	CSR-1302-S	CSR-1303-S	CSR-1304-S
CSN-751-S	CSN-752-S	CSN-1302-S	CSN-1303-S	CSN-1304-S

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves GN 2/1	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2015/1094 EN16825	clase climate 2015/1094 EN16825
CSR-750-S	-2°C +8°C	660	2160	735	3	505	230V-50Hz	R134a*	245	253	E	5 40°C 40%
								R290	502	243	D	5 40°C 40%
CSN-750-S	-20°C -15°C	660	2160	735	3	505	230V-50Hz	R290	606	553	E	4 30°C 55%
								R449A*	452	620	E	4 30°C 55%
CSR-1300-S	-2°C +8°C	1350	2160	735	6+3	1201	230V-50Hz	R134a*	485	442	E	5 40°C 40%
								R290	845	373	D	5 40°C 40%
CSN-1300-S	-20°C -15°C	1350	2160	735	6+3	1201	230V-50Hz	R290	907	952	E	4 30°C 55%
								R449A*	1042	990	E	4 30°C 55%


*opcional - optional

características técnicas y constructivas sujetas a variación sin previo aviso

- Exterior en acero inox AISI-304, respaldo en chapa galvanizada
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas AISI-304 de apertura reversible (modelos 750), con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Estantes interiores de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Unidad condensadora ventilada y extraíble
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo CSR 40°C ambiente
CSN 32°C ambiente

we reserve the right to change specifications without prior notice

- AISI-304 stainless steel exterior, rear side in galvanized panel
- AISI-304 stainless steel interior, rounded corners and stamped bottom
- AISI-304 doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense (750 models)
- Shelves made of plasticized steel wire, height adjustable
- Stainless steel adjustable legs, 35 to 210 mm
- Removable and fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating temperature CSR 40°C ambient
CSN 32°C ambient

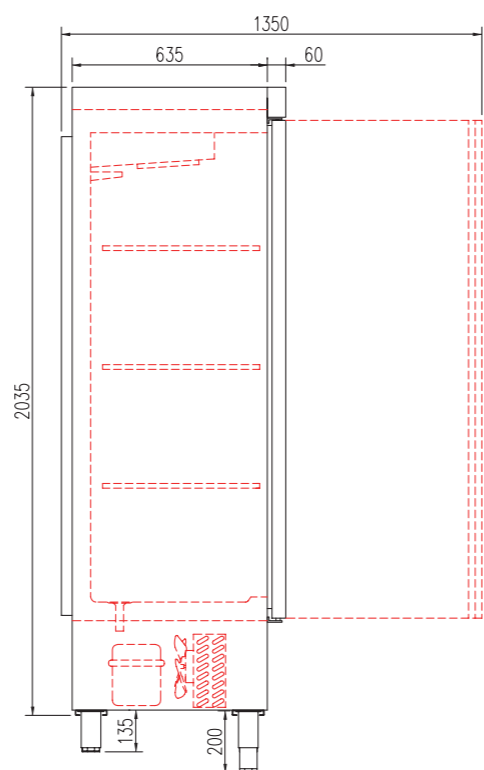

OPCIONES	OPTIONS	€
parrilla adicional	extra shelf	29 € x ud
parrilla intermedia adicional	extra middle shelf	17 € x ud
set 4 ruedas	4 castors set	80 € x set
set 6 ruedas	6 castors set	120 € x set
cambio R290 por R134a (+)	R290 to R134a (+)	0 €
cambio R290 por R449A (-)	R290 to R449A (-)	0 €
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz	consultar- consult

all photos must be considered as a reference - fotografías no contractuales



CSR-1303-S



CSR-751-S



CSR-752-S