



MFP-100




MFP-140



MFEI70-100



MFEI70-140



Incremento precio por cambio de puerta a cajonera doble, sistema autocierre  
Door to double drawers set, soft-closing system, increase of price



Cubetas GN y perfiles divisorios NO incluidos en el precio, ver página 416  
GN containers and dividers NOT included in price, see page 416

| mod        | rango<br>range<br>°C | largo<br>length<br>(mm) | alto<br>height<br>(mm) | fondo<br>depth<br>(mm) | estantes<br>shelves | pares guías<br>slides sets | volumen capacity<br>(L) | voltaje<br>voltage | refrigerante<br>refrigerant | potencia frig.<br>frig. power<br>W | potencia<br>power<br>W |
|------------|----------------------|-------------------------|------------------------|------------------------|---------------------|----------------------------|-------------------------|--------------------|-----------------------------|------------------------------------|------------------------|
| MFEI70-100 | 0°C<br>+8°C          | 925                     | 890                    | 700                    | 2                   | 2                          | 169                     | 230V-50Hz          | R290                        | 502                                | 764                    |
| MFEI70-140 | 0°C<br>+8°C          | 1375                    | 890                    | 700                    | 3                   | 3                          | 264                     | 230V-50Hz          | R290                        | 845                                | 490                    |
| MFP-100    | 0°C<br>+8°C          | 925                     | 890                    | 700                    | 2                   | 2                          | 169                     | 230V-50Hz          | R290                        | 502                                | 764                    |
| MFP-140    | 0°C<br>+8°C          | 1375                    | 890                    | 700                    | 3                   | 3                          | 264                     | 230V-50Hz          | R290                        | 845                                | 490                    |

Características técnicas y constructivas sujetas a variación sin previo aviso.


- **MFP** encimera granito, cúpula acristalada sobre alojamientos GN 1/6-100
- **MFEI70-100** encimera inox, cubierta inox abatible sobre expositor ingredientes GN 1/4-150
- Exterior en acero inox AISI-304
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Estantes interiores GN 1/1 de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 95- 135 mm
- Unidad condensadora ventilada y extraíble
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 32°C ambiente

We reserve the right to change specifications without prior notice.

- **MFP** granite working area and glass cover, GN 1/6-100 capacity
- **MFEI70-100** stainless steel worktop, integrated topping unit with inged lid, GN 1/4-150 capacity
- AISI-304 stainless steel exterior
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- GN 1/1 shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 95 to 135 mm
- Removable and fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating temperature 32°C ambient

| OPCIONES                   | OPTIONS                      |
|----------------------------|------------------------------|
| parrilla adicional GN-1/1  | additional shelf GN-1/1      |
| set adicional guías GN-1/1 | additional set GN-1/1 slides |
| cerradura puerta inox      | SS door lock                 |
| set 4 ruedas               | set 4 wheels                 |
| 230V 60Hz / 115V 60Hz      | 230V 60Hz / 115V 60Hz        |
| APPCC                      | HACCP                        |

Encimeras, alojamientos para cubetas y cubiertas, se pueden fabricar a medida.  
Worktops, container fits and covers, can be customized.

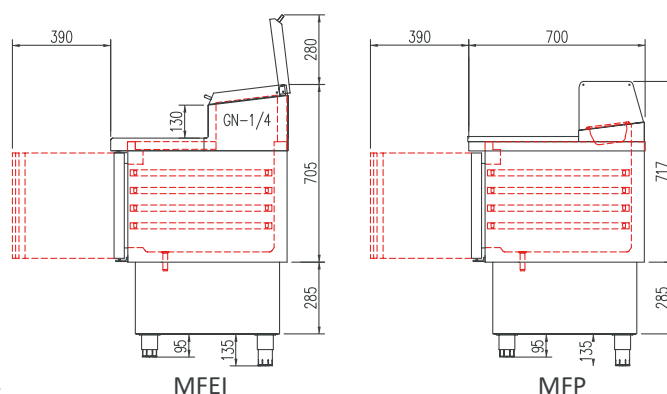



cerraduras opcionales  
locks on demand



evaporador central  
double fan evaporator



MFEI70-100  
5xGN1/4



MFEI70-140  
8xGN1/4



MFP-100  
5xGN1/6



MFP-140  
7xGN1/6

