



MRP-150
MCP-150



MRP-200
MCP-200



MRP-250



MRPV-150
MCPV-150



MRPV-200
MCPV-200



MRPV-250
MCPV-250

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves 40x60	pares guías slides sets	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2015/1094 EN16825
MRP-150	-2°C +8°C	1495	850	800	0	10	362	230V-50Hz	R134a	178	211	C
									R290*	280	218	B
MRP-200	-2°C +8°C	2020	850	800	0	15	562	230V-50Hz	R134a	245	249	D
									R290*	280	220	C
MRP-250	-2°C +8°C	2545	850	800	0	20	761	230V-50Hz	R134a	304	289	C
									R290*	739	412	B
MRPV-150	-2°C +8°C	1495	850	800	0	10	362	230V-50Hz	R134a	304	298	-
									R290*	280	221	-
MRPV-200	-2°C +8°C	2020	850	800	0	15	562	230V-50Hz	R134a	304	302	-
									R290*	502	257	-
MRPV-250	-2°C +8°C	2545	850	800	0	20	761	230V-50Hz	R134a	485	446	-
									R290*	739	410	-
MCP-150	-20°C -15°C	1495	850	800	0	10	362	230V-50Hz	R290	606	535	F
									R452A*	353	552	F
MCP-200	-20°C -15°C	2020	850	800	0	15	562	230V-50Hz	R290	606	556	F
									R452A*	452	610	E
MCPV-150	-20°C -15°C	1495	850	800	0	10	362	230V-50Hz	R290	606	544	-
									R452A*	353	518	-
MCPV-200	-20°C -15°C	2020	850	800	0	15	562	230V-50Hz	R290	606	569	-
									R452A*	452	681	-

*opcional - optional


Características técnicas y constructivas sujetas a variación sin previo aviso.

We reserve the right to change specifications without prior notice.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Encimera de acero inox AISI-304 con frente curvo (opcional con peto)
- Pies en tubo de acero inox ajustables en altura 125 - 200 mm
- Unidad condensadora ventilada y extraíble
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo: 38°C ambiente

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- AISI-304 stainless steel worktop, with rounded front (optional with upstand)
- AISI -304 adjustable legs, 125 to 200 mm
- Removable and fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating temperature: 38°C ambient


OPCIONES	OPTIONS	€
parrilla suplemento	extra shelf supplement	24 € x ud
parrilla 60x40	60x40 shelf	24 € x ud
set adicional guías 60x40	60x40 slides extra set	19 € x set
cambio R134a por R290	R134a to R290	+ 5 %
cambio R290 por R452A	R290 to R452A	0 %
cerradura puerta inox	solid door lock	15 € x ud
cerradura puerta cristal	glass door lock	46 € x ud
motor lado izquierdo	left side engine	56 €
encimera con peto	worktop with upstand	0 €
set 4 ruedas perez	4 castors set	76 € x set
set 6 ruedas	6 castors set	117 € x set
registrador de alarmas HACCP	HACCP alarm recorder	250 € x set
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz	consultar- consult
tropicalizado 43°C	tropicalized to 43°C	consultar- consult
pre-instalación	remote compressor	consultar - consult
respaldo inox	stainless steel rear side	consultar- consult
encimera de granito	granite worktop	consultar- consult

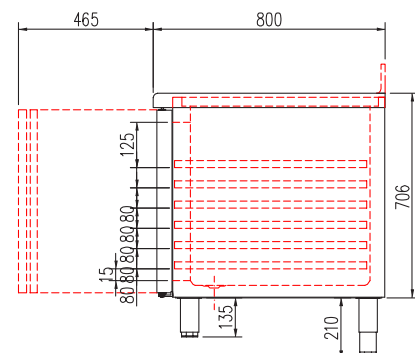

Mesa fría 60x40, refrigeración y congelados
60x40 chiller and freezer counter

1

all photos must be considered as a reference - fotografías no contractuales



MRPV-250
dotación parillas extra
with extra shelves



MRP-250

Encimera granito opcional
Optional granite worktop



Pre-instalación opcional
Optional remote compressor

