

MFK70-135	2.355 €	MFK70-180	2.870 €
-----------	---------	-----------	---------

Cubetas GN NO incluidas en el precio - GN containers NOT included in price
ver página 380 - see page 380

Características técnicas - Technical data

mod.	rango range	largo length (mm)	alto heighth (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	peso neto net weight (Kg)	estantes shelves	pares de guías sets of slides	tensión monofásica single phase voltage	refrigerante coolant
MFK70-135	0°C+8°C	1345	850	700	300	350	265	135	2	2	230 V - 50 Hz	R-134a
MFK70-180	0°C+8°C	1795	850	700	500	615	450	168	3	3	230 V - 50 Hz	R-134a

Características técnicas y constructivas sujetas a variación sin previo aviso.

We reserve the right to change specifications without prior notice.


FAST FOOD

- Exterior en acero inox AISI-304
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Encimera inox con capacidad cubetas GN 1/3-100 (ver detalle)
- Cúpula acristalada sobre alojamiento cubetas, con estante intermedio
- Estantes interiores de alambre en acero plastificado, regulables en altura, sobre guías de acero inox
- Pies en tubo de acero inox ajustables en altura 125 - 200 mm
- Unidad condensadora ventilada y extraíble
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 32°C ambiente

- AISI-304 stainless steel exterior
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- AISI-304 stainless steel worktop, capacity for GN-1/3-100 containers (see detail)
- Glass cover with shelf
- Shelves made of plasticized steel wire, height adjustable by stainless steel slides
- AISI -304 adjustable legs, 125 to 200 mm
- Removable and fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating temperature, 32°C ambient

Opciones - Options

parrilla adicional GN 1/1	GN 1/1 extra shelf	23 € x ud
set adicional guías GN 1/1	GN 1/1 slides extra set	25 € x set
cerradura puerta inox	solid door lock	15 € x ud
motor lado izquierdo	left side engine	55 €
set 4 ruedas	4 castors set	75 € x set
set 6 ruedas	6 castors set	115 € x set
registrador de alarmas HACCP	HACCP alarm recorder	245 € x set
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz	consultar - consult

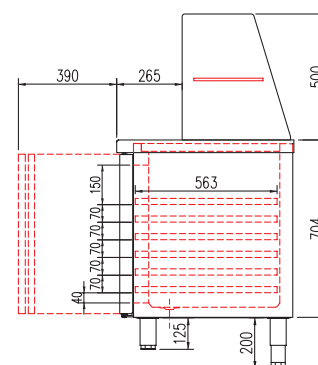

Encimeras, alojamientos para cubetas y cubiertas, se pueden fabricar a medida.
Worktops, container fits and covers, can be customized.

all photos must be considered as a reference - fotografías no contractuales

evaporador central
double fan evaporator




MFK70-180



MFK70-135
Vista trasera
Back side view

MFK70-135

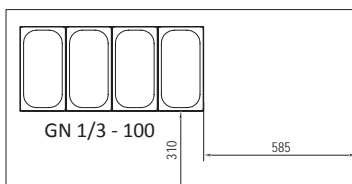

MFK70-180

