



MFCG-150 2.399 €



MFCG-200 2.803 €



MFCG-250 3.397 €



MFCG-300 3.971 €

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves GN 1/1	pares guías slides sets	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W
MFCG-150	-2°C +8°C	1345	850	780	2	2	255	230V-50Hz	R134a	304	293
									R290*	502	239
MFCG-200	-2°C +8°C	1795	850	780	3	3	399	230V-50Hz	R134a	304	293
									R290*	502	239
MFCG-250	-2°C +8°C	2245	850	780	4	4	543	230V-50Hz	R134a	485	429
									R290*	739	410
MFCG-300	-2°C +8°C	2695	850	780	5	5	686	230V-50Hz	R134a	485	431
									R290*	739	410

*opcional - optional


REFRIGERATED COUNTERS • MESAS REFRIGERADAS

Características técnicas y constructivas sujetas a variación sin previo aviso.

We reserve the right to change specifications without prior notice.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Encimera de acero inox AISI-304 con frentes curvos
- Estantes interiores GN 1/1 de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 125 - 200 mm
- Unidad condensadora ventilada y extraíble
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 38°C ambiente

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- AISI-304 stainless steel worktop, with rounded fronts
- GN 1/1 shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 125 to 200 mm
- Removable and fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating temperature 38°C ambient

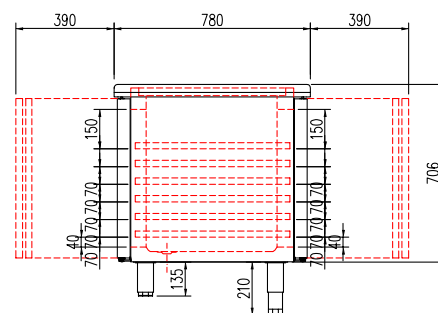

Pre-instalación opcional
Optional remote compressor



OPCIONES	OPTIONS	€
parrilla suplemento	extra shelf supplement	18 € x ud
parrilla adicional GN 1/1	GN 1/1 extra shelf	23 € x ud
set adicional guías GN 1/1	GN 1/1 slides extra set	25 € x set
cambio R134a por R290	R134a to R290	+ 5 %
cerradura puerta	door lock	15 € x ud
motor lado izquierdo	left side engine	56 €
encimera con fregadero	worktop with sink	consultar - consult
motor lado izquierdo + fregadero	left side engine + sink	consultar - consult
set 4 ruedas	4 castors set	76 € x set
set 6 ruedas	6 castors set	117 € x set
registrador de alarmas HACCP	HACCP alarm recorder	250 € x set
tropicalizado 43°C	tropicalized to 43°C	consultar - consult
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz	consultar - consult
pre-instalación	remote compressor	consultar - consult
respaldo inox	stainless steel rear side	consultar - consult

all photos must be considered as a reference - fotografías no contractuales



MFCG-250
puerta de cristal a 1 cara (opcional) vista trasera
glass doors (option), rear view



MFCG-250



Fregadero 340 x 360 x 160
340 x 360 x 160 Sink

optional

