


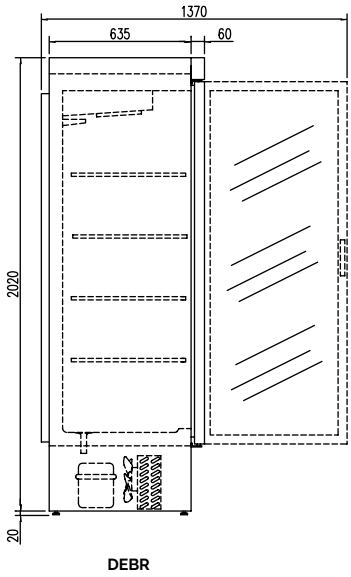

CARACTERÍSTICAS TÉCNICAS

- DEBR-BI: Exterior en acero plastificado color blanco, e interior en acero inoxidable AISI-304
- DEBR-NI Exterior en acero plastificado color negro, e interior en acero inoxidable AISI-304
- DEBR-BB Exterior e interior en acero plastificado color blanco
- DEBR-NN Exterior e interior en acero plastificado color negro
- Puertas de color negro, apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- DEBR: Doble cristal
- Estantes interiores REFORZADOS de alambre en acero plastificado, regulables en altura
- Reguladores de altura, ruedas o patas opcionales
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, bajo GWP y cero efecto ODP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de funcionamiento a 32°C ambiente
- Refrigerante R-290

TECHNICAL DATA

- DEBR-BI: White plastified steel exterior, AISI-304 stainless steel interior
- DEBR-NI: Black plastified steel exterior, AISI-304 stainless steel interior
- DEBR-BB: White plastified steel exterior and interior
- DEBR-NN: Black plastified steel exterior and interior
- Black color doors, with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- DEBR: Double glazed
- Shelves made REINFORCED of plasticized steel wire, height adjustable
- Height adjusters, wheels or optional legs
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- Injected polyurethane insulation, density 40 Kg/m³, low GWP and zero ODP effect
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32°C ambient
- Refrigerant R-290

Modelo Model	Largo Length	Alto Height	Fondo Depth	Rango Range	Estantes Shelves	Capacidad Capacity	Potencia frig. Frig. Power	Consumo Nominal Nominal power
	mm	mm	mm		Uds	L	W	W
DEBR-751	680	2055	735	-2+8	4	505	502	260
DEBR-1302	1370	2055	735	-2+8	8	1201	845	396
DEBR-2003	2055	2055	735	-2+8	12	1852	1702	943

EXPOSITOR REFRIGERADO DEBR



DEBR-1302-NI

A
↑
G

C

Clase Eficiencia Energética (Pag. 624)
Energy Efficiency Class (Pag. 624)


OPCIONALES · OPTIONS

Modelo	Set 4 ruedas	Set 6 ruedas	Set 4 patas	Set 6 patas	Porta-precios	Parrilla adicional	Cerradura puerta cristal
Model	4 Castors set	6 Castors set	4 feet set	6 feet set	Label-holder strtip	Extra shelf	Glass door lock

DEBR-751

DEBR-1302

DEBR-2003

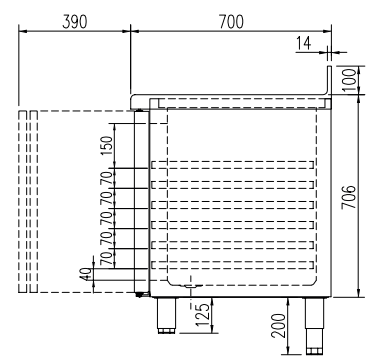

CLARION MGR

docriluc



MGR-180



DETALLE FREGADERO
SINK DETAIL



MGR-180-2/3

MESAS FRIAS

						CCE EEC 2015/ 1094 EN22041	clase climate 2015/1094 EN22041
Modelo Model	Rango Range	Estantes Shelves	Capacidad Capacity L	Potencia Frig. Frig Power W	Consumo Nominal Nominal Cons.		
MGR-135	-2°C + 8°C	2	255	502	290	B	5 (40°C 40%)
MGC-135	-20°C - 15°C	2	255	606	860	D	5 (40°C 40%)
MGRF-135	-2°C + 8°C	2	255	502	290	B	5 (40°C 40%)

MGR-180	-2°C + 8°C	3	399	502	290	B	5 (40°C 40%)
MGC-180	-20°C - 15°C	3	399	606	881	D	4 (30°C 55%)
MGRF-180	-2°C + 8°C	3	399	502	290	B	5 (40°C 40%)

MGR-225	-2°C + 8°C	4	543	845	320	C	5 (40°C 40%)
MGRF-225	-2°C + 8°C	4	543	845	348	C	5 (40°C 40%)

MGR-270	-2°C + 8°C	5	686	845	320	C	5 (40°C 40%)
MGRF-270	-2°C + 8°C	5	686	845	348	C	5 (40°C 40%)



Tu elección rápida, en stock, siempre listo
Your quick choice, always in stock, always ready

OPCIONALES · OPTIONS

Parrilla suplemento	Supplement extra shelf
Parrilla adicional GN 1/1	GN 1/1 Extra shelf
Set adicional guías GN 1/1	GN 1/1 Slides extra set
Cajonera doble inox, auto-cierre	Double drawers set, self-closing
Cajonera triple inox, auto-cierre	Triple drawers set, self-closing
Cerradura puerta inox	Solid door lock
Motor lado izquierdo	Left side engine
Encimera sin peto	No upstand worktop
Set 4 ruedas	4 Castors set
Set 6 ruedas	6 Castors set
Registrador de alarmas HACCP	HACCP alarm recorder
Respaldo inox	Stainless steel rear side
Tropicalizado 43°C	Tropicalized to 43°C
230V 60hz / 115V 60hz	230V 60hz / 115V 60hz

Consultar - Consult
Consultar - Consult
Consultar - Consult
Consultar - Consult