


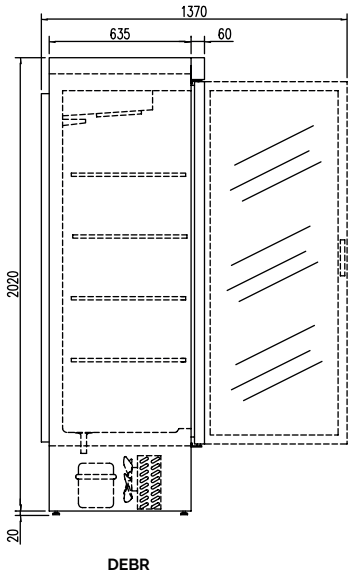

CARACTERÍSTICAS TÉCNICAS

- DEBR-BI: Exterior en acero plastificado color blanco, e interior en acero inoxidable AISI-304
- DEBR-NI Exterior en acero plastificado color negro, e interior en acero inoxidable AISI-304
- DEBR-BB Exterior e interior en acero plastificado color blanco
- DEBR-NN Exterior e interior en acero plastificado color negro
- Puertas de color negro, apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- DEBR: Doble cristal
- Estantes interiores REFORZADOS de alambre en acero plastificado, regulables en altura
- Reguladores de altura, ruedas o patas opcionales
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, bajo GWP y cero efecto ODP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de funcionamiento a 32°C ambiente
- Refrigerante R-290

TECHNICAL DATA

- DEBR-BI: White plastified steel exterior, AISI-304 stainless steel interior
- DEBR-NI: Black plastified steel exterior, AISI-304 stainless steel interior
- DEBR-BB: White plastified steel exterior and interior
- DEBR-NN: Black plastified steel exterior and interior
- Black color doors, with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- DEBR: Double glazed
- Shelves made REINFORCED of plasticized steel wire, height adjustable
- Height adjusters, wheels or optional legs
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- Injected polyurethane insulation, density 40 Kg/m³, low GWP and zero ODP effect
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32°C ambient
- Refrigerant R-290

Modelo Model	Largo Length	Alto Height	Fondo Depth	Rango Range	Estantes Shelves	Capacidad Capacity	Potencia frig. Frig. Power	Consumo Nominal Nominal power
	mm	mm	mm		Uds	L	W	W
DEBR-751	680	2055	735	-2+8	4	505	502	260
DEBR-1302	1370	2055	735	-2+8	8	1201	845	396
DEBR-2003	2055	2055	735	-2+8	12	1852	1702	943

EXPOSITOR REFRIGERADO DEBR

docriluc



DEBR-1302-NI

A
↑
G

C

Clase Eficiencia Energética (Pag. 624)
Energy Efficiency Class (Pag. 624)


OPCIONALES · OPTIONS

Modelo	Set 4 ruedas	Set 6 ruedas	Set 4 patas	Set 6 patas	Porta-precios	Parrilla adicional	Cerradura puerta cristal
Model	4 Castors set	6 Castors set	4 feet set	6 feet set	Label-holder strtip	Extra shelf	Glass door lock

DEBR-751

DEBR-1302

DEBR-2003

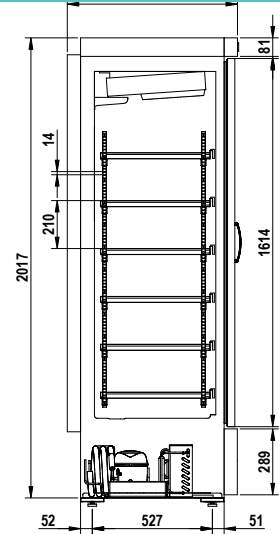

DEBRW

Modelo	Largo	Alto	Fondo	Rango	Estantes	Volumen	Capacidad	Potencia frig.	Consumo
Model	Length	Height	Depth	Range	Shelves	Capacity	Bottles capacity	Frig. Power	Nominal power
	mm	mm	mm		Uds	L	Uds	W	W



DEBRW-751-NI	680	2055	735	+4°C +18°C	6	505	105	502	260
DEBRW-751-NN	680	2055	735	+4°C +18°C	6	505	105	502	260



DEBRW-1302/2-NI	1370	2055	735	+4°C +18°C	12	505 + 505	105 + 105	502 + 502	260 + 260
DEBRW-1302/2-NN	1370	2055	735	+4°C +18°C	12	505 + 505	105 + 105	502 + 502	260 + 260



DEBRW-2003-NI	2055	2055	735	+4°C +18°C	18	1852	315	1814	1726
DEBRW-2003-NN	2055	2055	735	+4°C +18°C	18	1852	315	1814	1726



DEBRW-2003/2-NI	2055	2055	735	+4°C +18°C	12	1201 + 505	210 + 105	845 + 502	396 + 260
DEBRW-2003/2-NN	2055	2055	735	+4°C +18°C	12	1201 + 505	210 + 105	845 + 502	396 + 260

CÉPAGE DEBRW



DEBRW-1302/2-NN bi-temperatura



DEBRW-751-NI
Interior INOX y estantes especiales
SS interior,with customized shelves

docriluc

CAVAS

OPCIONALES · OPTIONS

Modelo	Estante adicional	Estante especial	Set 4 ruedas	Set 5 ruedas	Set 6 ruedas	Set 4 patas	Set 5 patas	Set 6 patas	Exterior inox o lacado
Model	Additional shelf	Special shelf	4 Castors set	5 Castors set	6 Castors set	4 Leg set	5 Leg set	6 Leg set	SS exterior or lacquered
DEBRW-751		consultar - consult							consultar - consult
DEBRW-1302		consultar - consult							consultar - consult
DEBRW-2003		consultar - consult							consultar - consult