


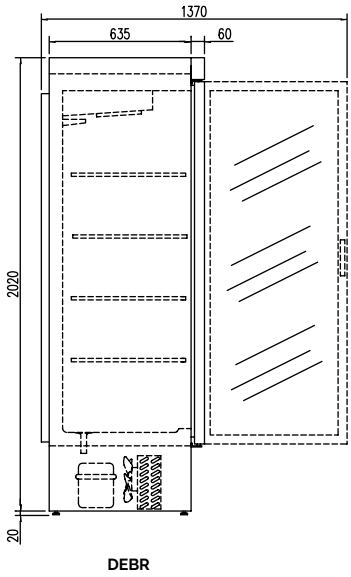

CARACTERÍSTICAS TÉCNICAS

- DEBR-BI: Exterior en acero plastificado color blanco, e interior en acero inoxidable AISI-304
- DEBR-NI Exterior en acero plastificado color negro, e interior en acero inoxidable AISI-304
- DEBR-BB Exterior e interior en acero plastificado color blanco
- DEBR-NN Exterior e interior en acero plastificado color negro
- Puertas de color negro, apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- DEBR: Doble cristal
- Estantes interiores REFORZADOS de alambre en acero plastificado, regulables en altura
- Reguladores de altura, ruedas o patas opcionales
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, bajo GWP y cero efecto ODP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de funcionamiento a 32°C ambiente
- Refrigerante R-290

TECHNICAL DATA

- DEBR-BI: White plastified steel exterior, AISI-304 stainless steel interior
- DEBR-NI: Black plastified steel exterior, AISI-304 stainless steel interior
- DEBR-BB: White plastified steel exterior and interior
- DEBR-NN: Black plastified steel exterior and interior
- Black color doors, with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- DEBR: Double glazed
- Shelves made REINFORCED of plasticized steel wire, height adjustable
- Height adjusters, wheels or optional legs
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- Injected polyurethane insulation, density 40 Kg/m³, low GWP and zero ODP effect
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32°C ambient
- Refrigerant R-290

Modelo Model	Largo Length	Alto Height	Fondo Depth	Rango Range	Estantes Shelves	Capacidad Capacity	Potencia frig. Frig. Power	Consumo Nominal Nominal power
	mm	mm	mm		Uds	L	W	W
DEBR-751	680	2055	735	-2+8	4	505	502	260
DEBR-1302	1370	2055	735	-2+8	8	1201	845	396
DEBR-2003	2055	2055	735	-2+8	12	1852	1702	943

EXPOSITOR REFRIGERADO DEBR

docriluc



DEBR-1302-NI

A
↑
G

C

Clase Eficiencia Energética (Pag. 624)
Energy Efficiency Class (Pag. 624)


OPCIONALES · OPTIONS

Modelo	Set 4 ruedas	Set 6 ruedas	Set 4 patas	Set 6 patas	Porta-precios	Parrilla adicional	Cerradura puerta cristal
Model	4 Castors set	6 Castors set	4 feet set	6 feet set	Label-holder strtip	Extra shelf	Glass door lock

DEBR-751

DEBR-1302

DEBR-2003

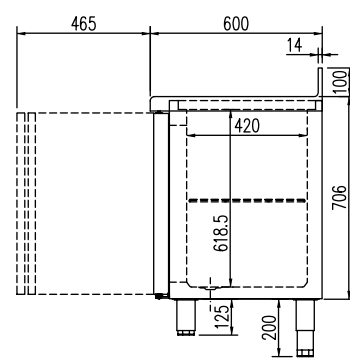

RADIANT MBR

docriluc



MBR-200

MESAS FRIAS

						CCE EEC 2015/1094 EN22041	clase climate 2015/1094 EN22041
Modelo Model	Rango Range	Estantes Shelves	Capacidad Capacity L	Potencia Frig. Frig Power W	Consumo Nom. Nominal Cons. W	Rango Range	Rango Range
MBR-150	-2°C + 8°C	2	245	502	290	B	5 (40°C 40%)
MBC-150	-20°C - 15°C	2	245	606	860	D	5 (40°C 40%)
MBRF-150	-2°C + 8°C	2	245	502	290	B	5 (40°C 40%)

MBR-200	-2°C + 8°C	3	380	502	290	B	5 (40°C 40%)
MBC-200	-20°C - 15°C	3	380	606	881	E	5 (40°C 40%)
MBR-200	-2°C + 8°C	3	380	502	290	B	5 (40°C 40%)

MBR-250	-2°C + 8°C	4	380	502	320	B	5 (40°C 40%)
MBRF-250	-2°C + 8°C	4	380	502	320	B	5 (40°C 40%)

MBR-300	-2°C + 8°C	5	380	502	320	B	5 (40°C 40%)
MBRF-300	-2°C + 8°C	5	380	502	320	B	5 (40°C 40%)



MBR-200 2/3

Tu elección rápida, en stock, siempre listo

Your quick choice, always in stock, always ready

OPCIONALES · OPTIONS

Parrilla adicional central	Central extra shelf central	
Parrilla adicional lateral	Side extra shelf	
Cajonera doble inox, auto-cierre	Double drawers set, self-closing	
Cajonera triple inox, auto-cierre	Triple drawers set, self-closing	
Cerradura puerta inox	Solid door lock	
Motor lado izquierdo	Left side engine	
Encimera sin peto	No upstand worktop	
Set 4 ruedas	4 Castors set	
Set 6 ruedas	6 Castors set	
Registrador de alarmas HACCP	HACCP alarm recorder	Consultar - Consult
Respaldo inox	Stainless steel rear side	Consultar - Consult
Tropicalizado 43°C	Tropicalized to 43°C	Consultar - Consult
230V 60hz / 115v 60hz	230V 60hz / 115v 60hz	Consultar - Consult



Detalle barras carniceras
Butcher bars detail



PHANTOM DASC-75

+4°C
+30°C

50%
90%



DASCV-751

docriluc

DRY AGED

CICLO - CYCLE	tiempo - time		temperatura - temperature		humedad* - humidity*	
	min	max	min	max	min	max
ESTUFAJE - DRIPPING	1 h	240 h	22°C	30°C	no	no
SECADO - DRYING	1 h	240 h	4°C	16°C	50%	90%

Modelo Model	Rango Range	Estantes Shelves	Barras carniceras Butchers bars	Capacidad Capacity L	Estufaje Dripping	Secado Drying	Potencia Frig. Frig Power W	Consumo Nom. Nominal Cons. W	clase climate 2015/1094 EN16825 Rango Range
DASC-751	+4°C +30°C	Opc.	3 KIT	505	✓	✓	490	812	5 (40°C 40%)
DASCV-751	+4°C +30°C	Opc.	3 KIT	505	✓	✓	490	812	5 (40°C 40%)
DASC-S-751	+4°C +16°C	Opc.	3 KIT	505	NO	✓	490	265	5 (40°C 40%)
DASC-ES-752	+4°C +30°C	Opc.	2 KIT	245+245	✓	✓	630	916	5 (40°C 40%)

OPCIONALES · OPTIONS

Parrilla adicional	Extra shelf	
Parrilla adicional intermedia	Extra middle shelf	
Barras carniceras	Bars for meat set	
Set 4 ruedas	4 Castors set	
Set 6 ruedas	6 Castors set	
Cerradura puerta inox	Stainless steel door lock	
Conexion WIFI o BT	WIFI or BT module	consultar - consult
Respaldo inox	Stainless steel rear side	consultar - consult
230V 60hz / 115v 60hz	230V 60hz / 115v 60hz	consultar - consult



DASC-140-2



DASCV-140-2



DASC-S-140-2



DASC-ES-140-3

Modelo Model	Rango Range	Estantes Shelves	Barras carniceras Butchers bars	Capacidad Capacity L	Estufaje Dripping	Secado Drying	Potencia Frig. Frig Power W	Consumo Nom. Nominal Cons. W	clase climate 2015/1094 EN16825 Rango Range
DASC-140-2	+4°C +30°C	Opc.	6 KIT	1201	✓	✓	750	1175	5 (40°C 40%)
DASCV-140-2	+4°C +30°C	Opc.	6 KIT	1201	✓	✓	750	1175	5 (40°C 40%)
DASC-S-140-2	+4°C +16°C	Opc.	6 KIT	1201	NO	✓	750	360	5 (40°C 40%)
DASC-ES-140-3	+4°C +30°C	Opc.	4 + 1 KIT	956+245	✓	✓	1065	1096	5 (40°C 40%)

PHANTOM DASC-140

+4°C
+30°C

50%
90%



DASC-140-2

docriluc

DRY AGED

OPCIONALES · OPTIONS

Parrilla adicional	Extra shelf	
Parrilla adicional intermedia	Extra middle shelf	
Barras carniceras	Bars for meat set	
Set 5 ruedas	5 Castors set	
Set 6 ruedas	6 Castors set	
Cerradura puerta inox	Stainless steel door lock	
Conexion WIFI o BT	WIFI or BT module	consultar - consult
Respaldo inox	Stainless steel rear side	consultar - consult
230V 60hz / 115v 60hz	230V 60hz / 115v 60hz	consultar - consult