




HBF510/HBF510S Series

# Culinary Blenders

HBF510S-CE/-UK

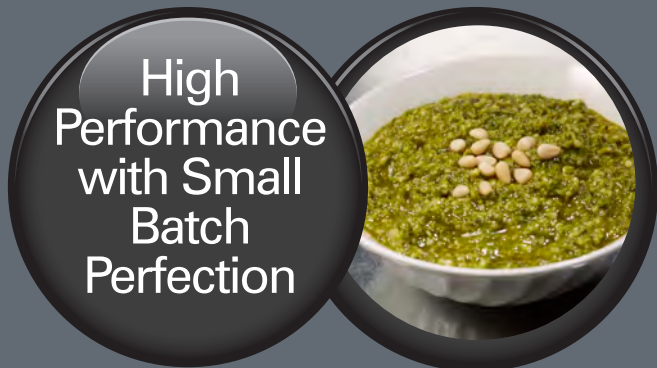

HBF510-CE/-UK

## EXPEDITOR™ family of blenders

Powerful 2.4 HP\* motor lets chefs blend ingredients quickly and optimizes blending consistency

Lid-open sensor prevents blending with lid removed

Blade design and jar shape help chefs create silky purees, creamy soups, and signature drizzles to maximize profits

Adjustable variable speed dial + pulse provide complete blending control

\*input power



For more Good Thinking® visit [hamiltonbeachcommercial.com](http://hamiltonbeachcommercial.com)





**Dosing Cup**

118 ml/4 oz. capacity makes adding liquids for emulsions easy



**Lid-Open Sensor**

Prevents blending with lid removed

**HBF510-CE/-UK**

**1.4 L (48 oz.) BPA-Free Co-Polyester Container**

Lets chefs easily monitor blending consistency and is virtually unbreakable

**2.4 Peak HP\* Motor**

**Protective Brow**

Directs drips away from control

**Sealed Paddle Switches**

Leak-resistant and easy to use

**Variable Speeds**

Provide complete blending control

**Lid Open and Jar Pad Sensor**

Prevents blending if jar or lid are not on correctly

\*input power



**HBF510S-CE/-UK**

**1.8 L (64 oz.) Stainless Steel Container**

Perfect for hot and cold food applications



**Durable Metal Drive Coupling**

Provides long-lasting performance for uninterrupted use

**Removable Jar Pad**

For easy cleaning

**Sure Grip™ Feet**

Holds blender securely on the countertop

**HBF510-CE/-UK**



**SPECIFICATIONS:**

Standard: unit comes with 2.4 HP motor base with 152 cm/5ft power cord, BPA free co-polyster container

Controls: Sealed paddle switches, variable speed dial

Weight: 5.6 kg / 12.3 lbs (shipping)

Warranty: 2 years parts & labor

220-240 V~ 50-60 Hz 6.5 A

Standard: unit comes with 2.4 HP motor base with 152 cm/5ft power cord, stainless steel container

Controls: Sealed paddle switches, variable speed dial

Weight: 6.3 kg/13.9 lbs (shipping)

Warranty: 2 years parts & labor

220-240 V~ 50-60 Hz 6.5 A

**HBF510S-CE/-UK**

