


ECOMAX PLUS SERIES

UNDERCOUNTER



Undercounter DishwasherECO+F515-11D

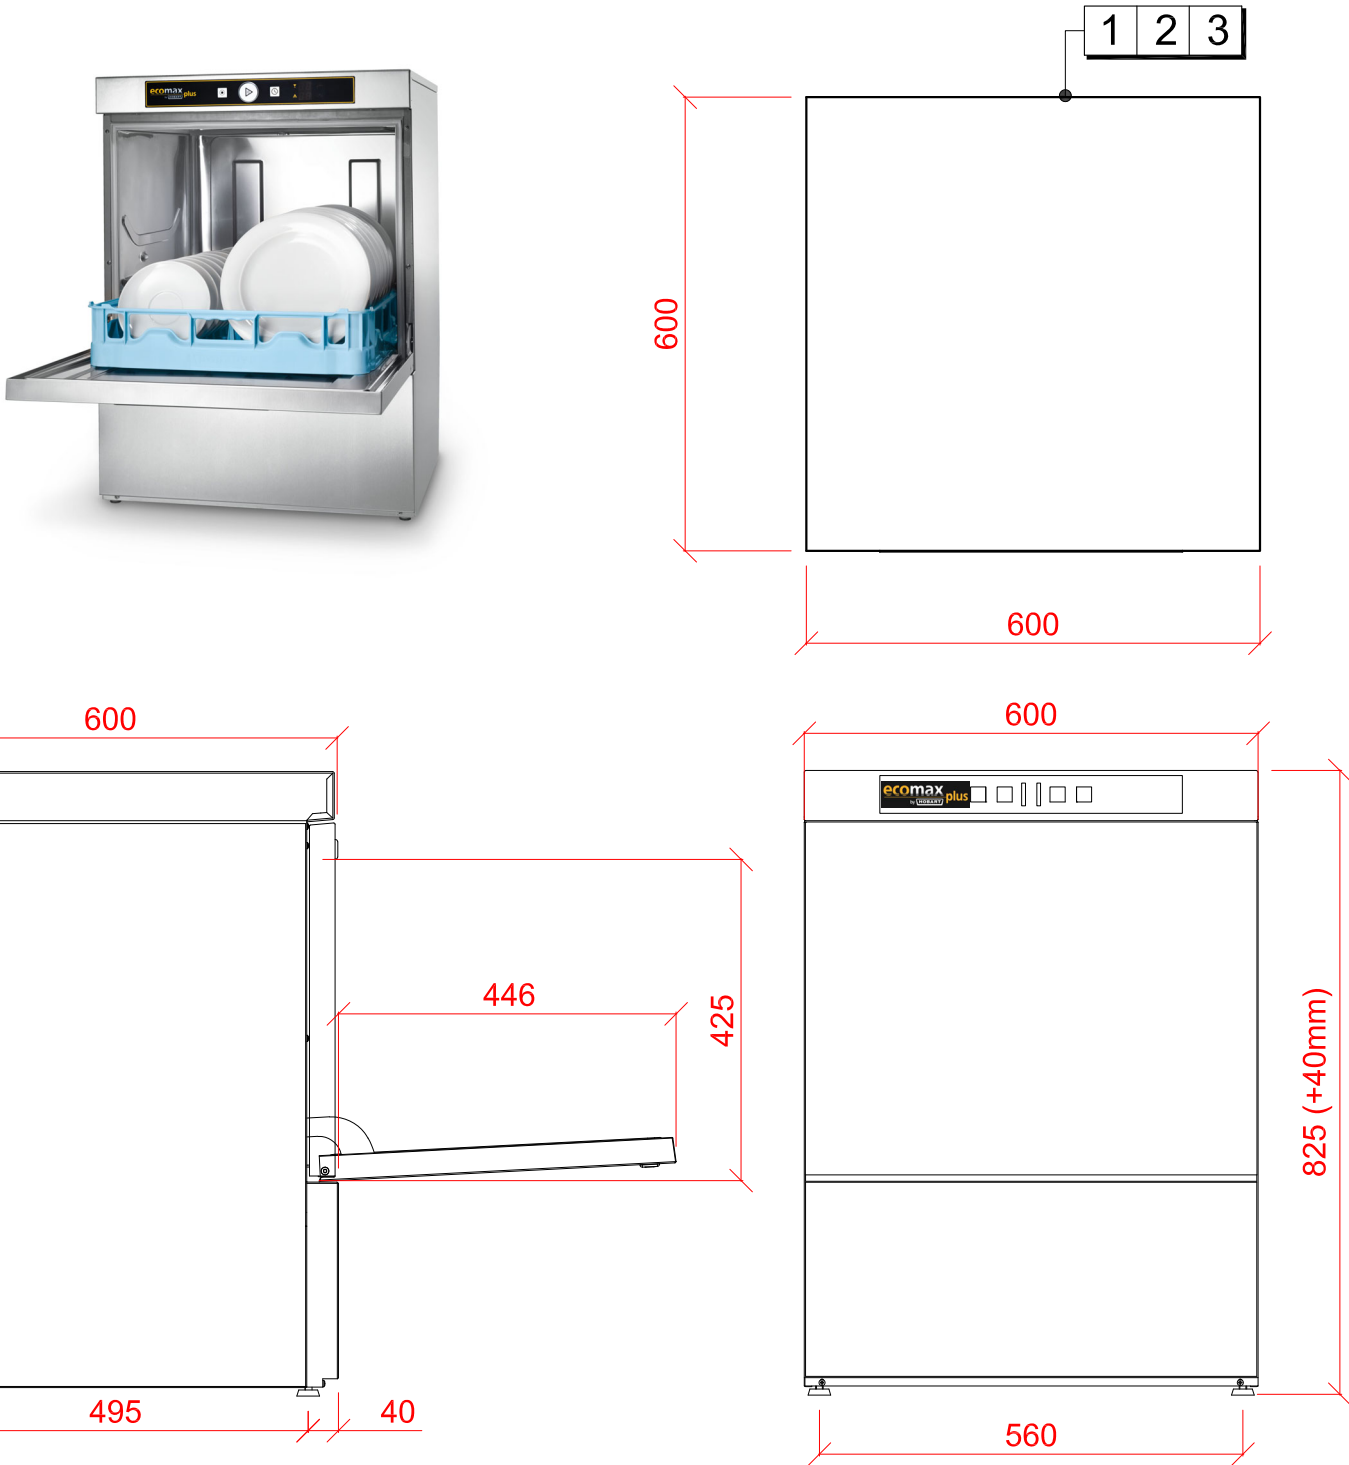

1 Water	2 Drain	3 Electric
22mm CONNECTION VIA 2 METRE FLEXIBLE HOSE, FEMALE TERMINATION. WATER SUPPLY 10°C TO 60°C @ 0.6 TO 10.0 BAR MAX. INITIAL TANK FILL 10.6 LITRES. RINSE WATER USAGE 2.0 LITRES PER CYCLE. MAX USAGE 60 CYCLES PER HOUR.	DRAIN - 2 METRE FLEXIBLE HOSE TO A 40 mm TRAPPED STANDPIPE 600mm MAX A.F.F.L. FLOW RATE 30 LITRES PER MINUTE.	6.7kW 400/50/3 FUSED AT 16amps/ PHASE <b>CONFIGURABLE TO:</b> 4.7kW 230/50/1 + N + E FUSED AT 25amps 2.6kW 230/50/1 + N + E FUSED AT 13amps  MACHINE SUPPLIED WITH 2.5 METRES OF CABLE
OUR MACHINES ARE SUPPLIED WITH CLASS 'AB' AIR GAP AS STANDARD.	<b>Other Services</b> RINSE AGENT HOSE - 2.5 METRE FLEXIBLE. DETERGENT HOSE - 2.5 METRE FLEXIBLE.	<b>Notes</b> APPROX WEIGHTS: EMPTY: 65kg's WITH WATER: 87kg's <b>+40mm FEET HEIGHT ADJUST</b>

PLOT SCALE: 1:10

RIGHT TO MAKE NECESSARY CHANGES IS RESERVED