

Armarios de refrigeración y congelación GN1/1 / GN1/1 Refrigerator and freezer reach in / Armoires positives et négatives GN1/1

CONGELACIÓN / FREEZER / NÉGATIVE

REFRIGERACIÓN / REFRIGERATOR / POSITIVE

REFRIG/REFRIG/POSIT

MODELO
MODELE
MODÈLE



AGN301 BT

AGN602 BT

AGN602 MX

AGN302

AGN603

AGN604

AGN300 CR

AGN600 CR

Medidas Measures [mm] Mesures		482 x 695 x 2100 mm.	974 x 695 x 2100 mm.	974 x 695 x 2100 mm.	482 x 695 x 2100 mm.	974 x 695 x 2100 mm.	974 x 695 x 2100 mm.	482 x 695 x 2100 mm.	974 x 695 x 2100 mm.
Temperatura Temperature Température	[°C]	-18°C		-2°C/+8°C -18°C	-2°C/+8°C			+2°C/+6°C	
Clase Climática Climatic class Classe climatique	[°C]	4 / 38°C			5 / 40°C			4 / 38°C	
Tensión/Frecuencia Electrical data Tension électrique		230V/1ph/50Hz							
Controlador Controller Régulateur		Digital IP65							
Material Material [EXT/INT] Matériel		AISI 304							
Espesor Thickness Épaisseur	[mm]	55							
Aislamiento Isolation Isolation	[mm]	40kg/m ³ / Free CFC's / Zero ODP-GWP							
Capacidad Capacity Capacité	[L]	325	745	325+325	325	745		325	745
Puertas Doors Portes		1	2		2	3	4	1	2
Nº parrillas / Guías Nº shelves / Slides Nº de grilles / Glissière		3/3 (325x530)	6/6 (325x530)		3/3 (325x530)	6/6 (325x530)		4/4 (325x530)	8/8 (325x530)
Sistema de frío Cooling System Système de froid		Forzado / Forced air / Ventilé							
Desescarche Defrost Dégivrage		Gas caliente / Hot gas / Gaz chaud		Parada comp[+] Gas caliente[-] Compresor off[+] Hot gas[-] Arrêt compres[+] Gaz chaud[-]	Parada de compresor / Compressor off / Arrêt du compresseur				
Expansión Expansion Expansion		Válv. Expansión/ Expansion valve/ Détendeur thermostatique		Capilar[+] V. Exp[-] Cap[+] Exp. valve[-] Cap[+] V. d'exp[-]	Capilar / Capillary / Capillaire				
Potencia Power Puissance	[W]	550	725	772	237	406		252	456
Potencia frig. Cooling capacity Puissance Frig.	[W A -10°C]	445	720	370 / 445	370	690		370	690
Consumo Consumption Consommation	[kWh/ 24h]	4,83	9,22	-	1,40	1,85		-	-
Clase energética Energy class Classe Energ.		D		-	C			-	
Refrigerante Refrigerant Gaz		R-290							
Opcional Optional Options		230V/1ph/60Hz	Sin incremento / No increase / Sans supplément		Manejo control digital bluetooth o wifi / Operating digital control bluetooth or wifi / Trait. de contrôle digital bluetooth ou wifi		Juego de guías / Slides / Jeu de Glissières 151 € (GUIAC0115550; GUIAC0215550)		
		115V/1ph/60Hz	+3%		115V/1ph/60Hz	Sin incremento / No increase / Sans supplément			
		Parrilla / Wire shelf / Grille (502X12) Ruedas / Casters / Roulettes (705X16=2; 705X17=2) Cerradura / Lock / Serrure (506X209; 506X210)			Parrilla inoxidable / Stainless steel wire shelf / Grille Inox (502X46) Cerradura / Lock / Serrure (506X209; 506X210) Parrilla tupida / Extradense wire shelf / Grille renforcée (502X62) Ruedas / Casters / Roulettes (705X16=2; 705X17=2)			Parrilla tupida / Extradense wire shelf / Grille renforcée (502X62) Parrilla inox / Stainless steel wire shelf / Grille Inox (502X46) Cerradura/Lock/Serrure (506X60) Iluminación Led RGB con cambio de color (por puerta) / Led lighting RGB change of colour [per door] / LED RGB avec change- ment de couleur [par porte]	

Serie / Series / Série **SLIM LINE 300/600L**

+Info: www.infrico.com

AGN 301 BT




AGN 604



AGN 600 CR

Doble acristalamiento templado, bajo emisivo con carga de Argón [4-27-4]
 Double tempered glass, low emission with Argon charge [4-27-4]
 Double vitrage trempé à faible émissivité avec Argon [4-27-4]

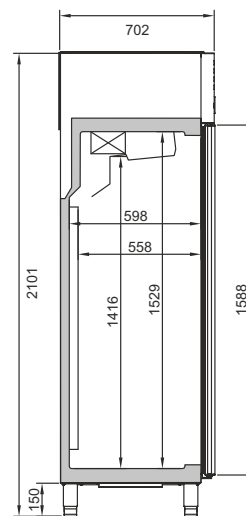

3. Armarios Reach Ins / Armoires

Controlador digital táctil e intuitivo IP 65.

Digital control easy and intuitive-touch screen IP65 protection.

Contrôleur digital tactile e intuitif IP 65.




Doble acristalamiento templado, bajo emisor con carga de Argón [4-27-4].

Double tempered glass, low-e with argon charge [4-27-4].

Double vitrage et verre trempé [4-27-4].



3

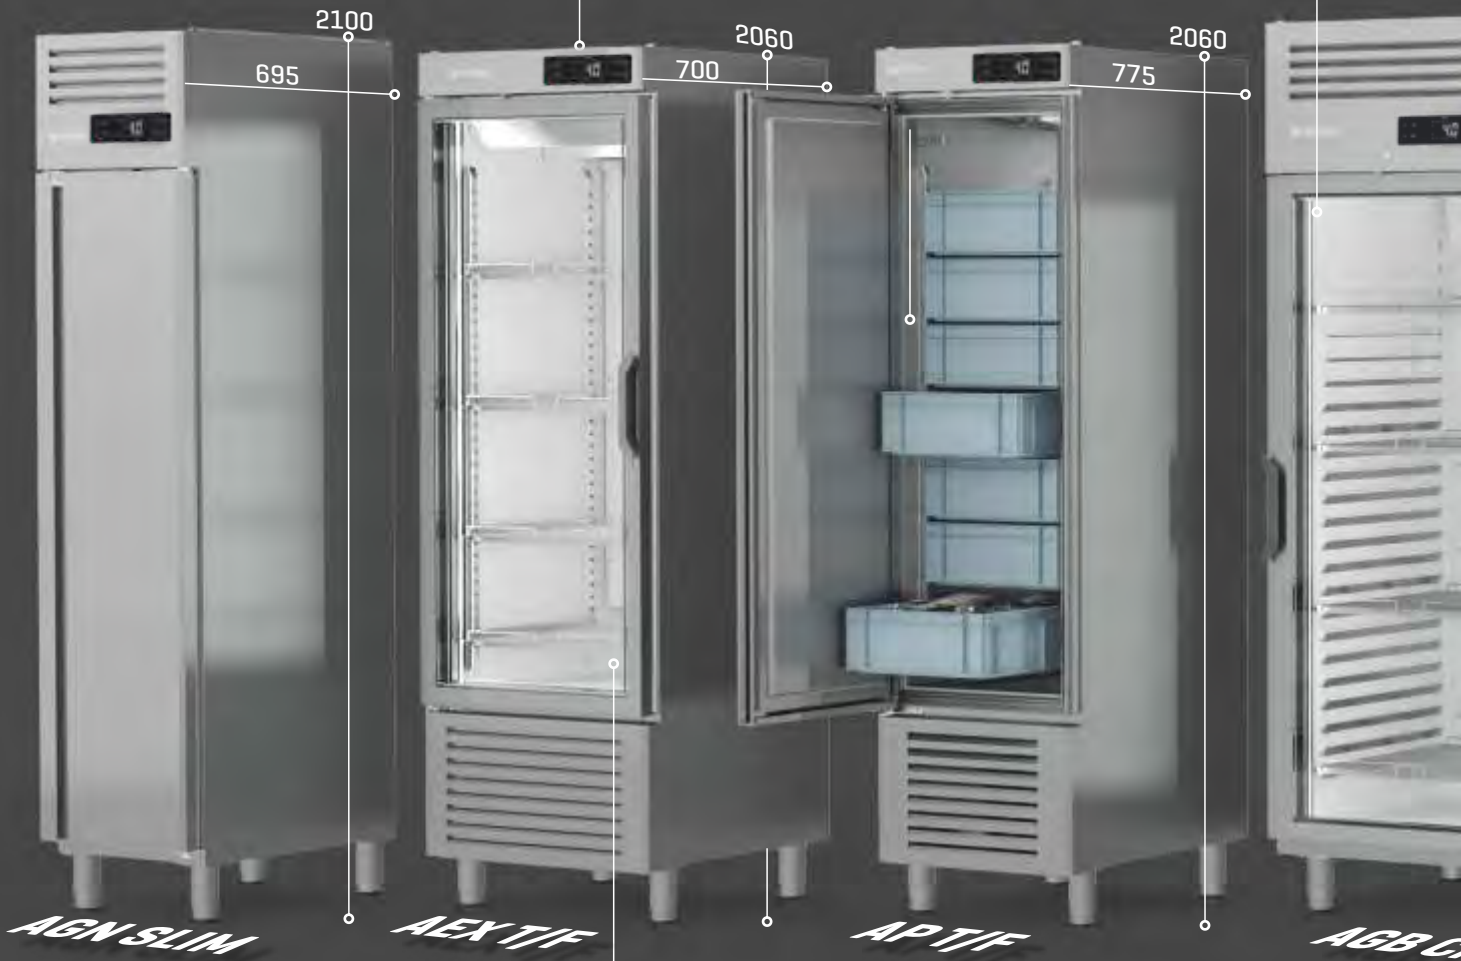

Iluminación / Lighting / Éclairage

Incorporación de iluminación LED, llegando a reducir el consumo energético entre un 80% y 90%, respecto a una bombilla tradicional. RGB opcional.

LED lighting incorporated, reducing energetic consumption between 80% and 90% respect to a traditional light bulb. RGB optional.

Éclairage LED, réduisant la consommation énergétique entre 80% et 90%, par rapport à une ampoule traditionnelle. RGB optionnel.




+Info: www.infrico.com


Monoblock



Puertas con tirador de doble agarre y burlete plano desmontable "cleanless".
Double handle doors and flat gasket easily removable "cleanless".
Portes avec double poignée et joint plat facilement démontable "cleanless".



Opcional: Manejo del control digital por WiFi o  Bluetooth*

Optional: Operating digital control by WiFi or  Bluetooth*

Optionnel: Fonctionnement de la commande numérique par WiFi ou  Bluetooth*

Opcional: Pata marina

Optional: Marine leg

Optionnel: Pied marin

