


3.

ARMARIO DE REFRIGERACIÓN Y CONGELACIÓN BOTTOM MOUNTED REACH IN REFRIGERATOR AND FREEZER

3



AN 501 T/F

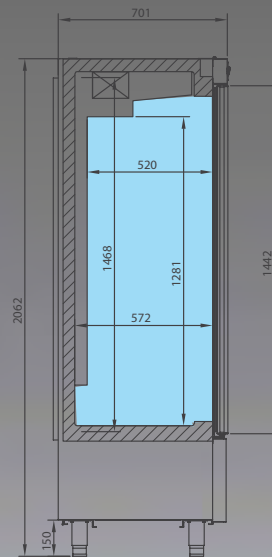

AN 501

MOD.

- Acero inox
Stainless Steel
[EXT/INT]
- Espesor
Thickness
[MM]
- Capacidad
Capacity
[L]
- Nº puertas
Doors
- Nº Parrillas/J. guías
Nº Shelves/Slides
- Sistema de frío
Cooling System
- Control digital
Digital control
- LED
- Potencia
Power
[W]
- Potencia frigorífica
Cooling capacity
[W A -10°C/-30°C]
- Consumo
Consumption
[kWh/24h]
- Clase energética
Energy class
- Refrigerante
Refrigerant

MOD.	Acero inox Stainless Steel [EXT/INT]	Espesor Thickness [MM]	Capacidad Capacity [L]	Nº puertas Doors	Nº Parrillas/J. guías Nº Shelves/Slides	Sistema de frío Cooling System	Control digital Digital control	LED	Potencia Power [W]	Potencia frigorífica Cooling capacity [W A -10°C/-30°C]	Consumo Consumption [kWh/24h]	Clase energética Energy class	Refrigerante Refrigerant
AN 501 T/F	AISI 304	75	500	1	3/3 (530x460)	Ventilado Forced air	IP65	✓	420	298	2,19	D	R 134 a
									190	343	1,45	C	R 290
AN 1002 T/F	AISI 304	75	1110	2	6/6 (530x510)	Ventilado Forced air	IP65	✓	510	464	3,91	C	R 134 a
									370	690	2,53	B	R 290
AN 501 BT	AISI 304	75	500	1	3/3 (530x460)	Ventilado Forced air	IP65	✓	600	644	5,72	D	R 290
AN 1002 BT	AISI 304	75	1110	2	6/6 (530x510)	Ventilado Forced air	IP65	✓	670	644	10,70	D	R 290

SERIE NACIONAL 500/1000L. SERIES


Motoventiladores EC
EC motorfans

Marco de puerta calefactado
Heated door frame

Desescarche por gas caliente
Hot gas defrost system

**Válvula de expansión
termostática**
Thermostatic expansion valve

AN 1002 BT

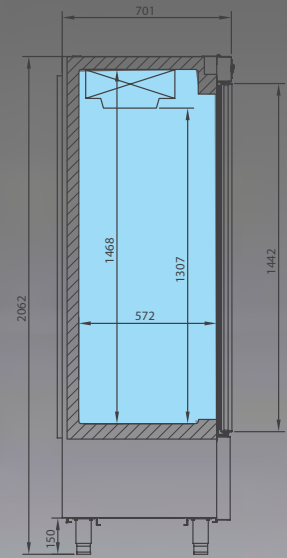

AN 1002

AN 501 T/F

1.913 €

687x700x2060 mm

Temp. -2°C/+8°C
C. Clima 5



AN 501 BT

2.693 €

687x700x2060 mm

Temp. -18°C
C. Clima 4



AN 1002 T/F

2.605 €

1385x700x2060 mm

Temp. -2°C/+8°C
C. Clima 5



AN 1002 BT

3.500 €

1385x700x2060 mm

Temp. -18°C
C. Clima 4




OPCIONAL / OPTIONAL

- Parrilla/ Wire shelf AN 500 [502X04] 37 €
- Parrilla/ Wire shelf AN 1000 [502X02] 37 €
- Juego de guías/ Slides AN 500 [503X14]; 503X19] 26 €
- Juego de guías/ Slides AN 1000 [503X12; 503X17] 26 €
- Barra carnicera/ Meat bar set (BCAN) 145 €
- Cerradura / Lock [506X209; 506X210] 31 €
- Ruedas / Casters [705X16=2; 705X17=2] 152 €

SERIE NACIONAL 500/1000L. SERIES

AN 1003

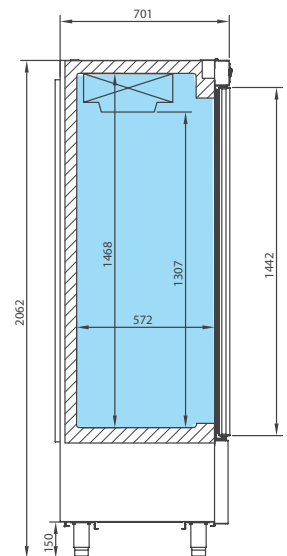

AN 1003

AN 502 T/F

1.956 €

687x700x2060 mm

Temp. -2°C/+8°C
C. Clima 5



AN 1003 T/F

2.656 €

1385x700x2060 mm

Temp. -2°C/+8°C
C. Clima 5



AN 1004 T/F

2.699 €

1385x700x2060 mm

Temp. -2°C/+8°C
C. Clima 5



OPCIONAL / OPTIONAL

- Parrilla / Wire shelf AN 500 [502X04] 37 €
- Parrilla / Wire shelf AN 1000 [502X02] 37 €
- Juego de guías / Slides AN 500 [503X14]; 503X19] 26 €
- Juego de guías / Slides AN 1000 [503X12; 503X17] 26 €
- Barra carnicera / Meat bar set [BCAN] 145 €
- Cerradura / Lock [506X209; 506X210] 31 €

ARMARIO DE CONGELACIÓN

BOTTOM MOUNTED FREEZER REACH IN

Fotos no contractuales / Non contractual pictures



AN 502 BT

**AN 502 BT****2.738 €**

687x700x2060 mm

Temp. -18°C.
C. Clima 4**AN 1003 BT****3.557 €**

1385x700x2060 mm

Temp. -18°C.
C. Clima 4**AN 1004 BT****3.608 €**

1385x700x2060 mm

Temp. -18°C.
C. Clima 4**MOD.**Acero inox
Stainless Steel
[EXT/INT]Espesor
Thickness
(MM)Capacidad
Capacity
(L)N° puertas
DoorsN° parrillas
/ J. Guías
Shelves/ slidesSistema de frío
Cooling SystemControl digital
Digital control

LED

Potencia
Power
(W)Potencia frigorífica
Cooling capacity
(W A -30°C)Consumo
Consumption
(kWh/24h)Clase energética
Energy classRefrigerante
Refrigerant

MOD.	Acero inox Stainless Steel [EXT/INT]	Espesor Thickness (MM)	Capacidad Capacity (L)	N° puertas Doors	N° parrillas / J. Guías Shelves/ slides	Sistema de frío Cooling System	Control digital Digital control	LED	Potencia Power (W)	Potencia frigorífica Cooling capacity (W A -30°C)	Consumo Consumption (kWh/24h)	Clase energética Energy class	Refrigerante Refrigerant
AN 502 BT	AISI 304	55	910	2	3/3 (530x460)	Ventilado Forced air	IP65	✓	600	644	5,72	D	R 290
AN 1003 BT	AISI 304	55	1110	3	6/6 (530x510)	Ventilado Forced air	IP65	✓	670	644	10,70	D	R 290
AN 1004 BT	AISI 304	55	1110	4	6/6 (530x510)	Ventilado Forced air	IP65	✓	670	644	10,70	D	R 290