

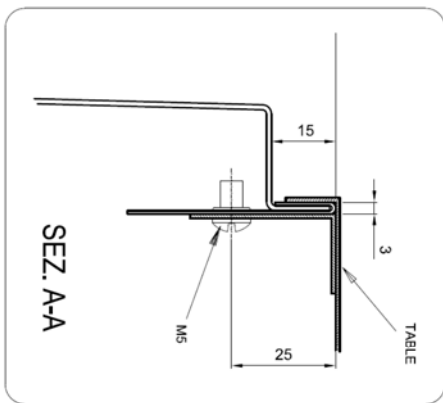


	Model	LCP4560ED		
	Code Production	TT3920INFCDD		
Interface :				
				
	Overall Dimension (Width-Depth-Height) *open	mm	788 - 835 - 1565(*2080)	
	Packaging Dimension (WxDxH)	mm	870x830x1540	
	Gross weight	Kg	130	
	Net weight	Kg	120	
	Volume	mc	1,10	
	Rack size	mm	500x600	
	Max door /hood opening	mm	465	
	Max glasses/plate Height	mm	440	
	General construction		double skin	
	Door/hood Construction		double skin	
	Tank construction		fully deep drawn	
	Tank volume	liter	30	
	Tank heating element	W	2500	
	Tank surface strainers		Yes-composite	
	Wash pump type		double flow	
	Wash pump power	W	1500	
	Wash temperature	°C	60	
	Boiler type		pressurized	
	Boiler volume	liter	6	
	Back-flow system		valve	
	Boiler heating element	W	8000	
	Rinse booster pump		no	
	Rinse booster pump power	W	-	
	Rinse temperature	°C	80	
	Rinse water consumption	Liter /rack	2,6	
	Optimal external water pressure	bar	2 - 4	
	Drain system		overflow	
	Drain pump		optional	
	Rinse aid dispenser	peristaltic	YES	
	Detergent dispenser	peristaltic	YES	
	Wash cycle	sec	60 - 120 - 150 - continuous	
	Electric Power	W	9500	
	Electric Connection	V - ph - Hz	400V 3N 50Hz	
	Fuse	A	20	
	Plates racks	n° 1	70180	
	Flat Rack	n° 1	70181	
	Cutterly Rack	n° 1	780081	
	Electric cable	n° 1	YES	
	Drain hose	n° 1	YES	
	Fill hose	n° 1	YES	


A		Ø 32 mm
B		G 3/4"
C		Power supply

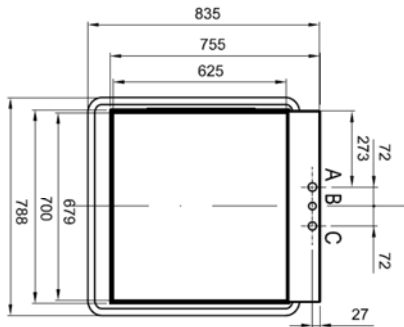

*
LUCE UTILE PER CESTELLO
USEFUL SPACE FOR BASKET
LUMIERE OUTILIE POUR PANIER
NUTZBARE OFFNUNG FÜR KORBE
ABERTURA UTIL PARA CESTO

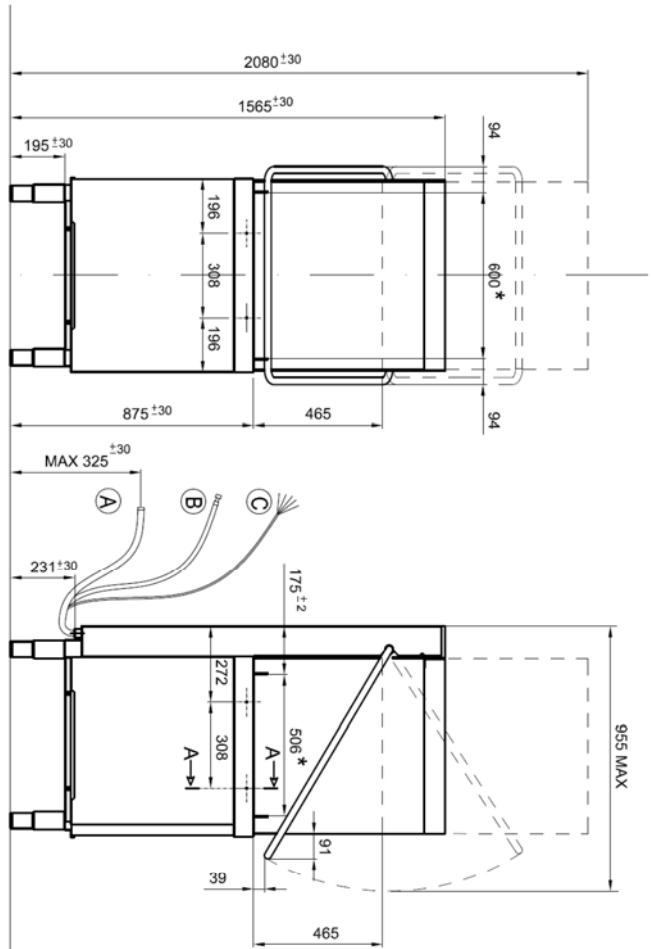



INSTALLAZIONE IN LINEA
LINEAR INSTALLATION
INSTALLATION EN LIGNE
ZEILENINSTALLATION
MESA EN LINEA

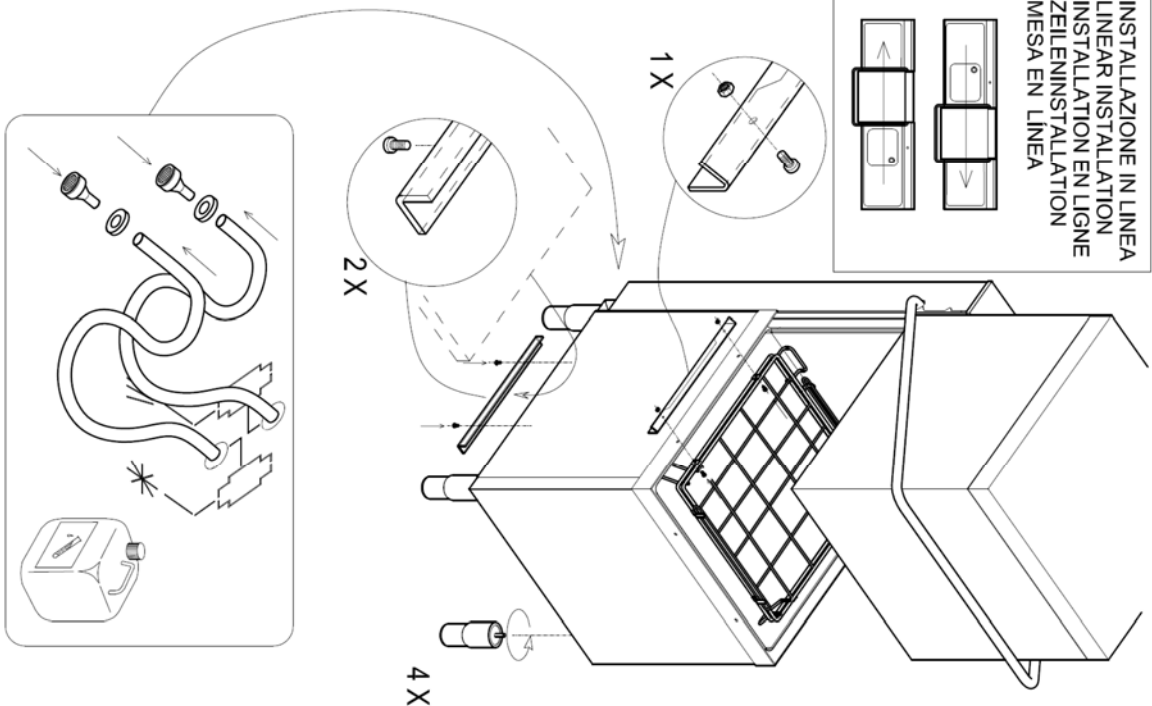




Designed by:	M.PUCCI	Date:	03.12.2013	Designation:	Hood type	Code:	70990	Rev.:	02	
--------------	---------	-------	------------	--------------	-----------	-------	-------	-------	----	---

		Model	LCP4560EDBD	
		Code Production	TT3921INFCDD	
Interface :				
				
	Overall Dimension (Width-Depth-Height) *open	mm	788 - 835 - 1565(*2080)	
	Packaging Dimension (WxDxH)	mm	870x830x1540	
	Gross weight	Kg	130	
	Net weight	Kg	120	
	Volume	mc	1,10	
	Rack size	mm	500x600	
	Max door /hood opening	mm	465	
	Max glasses/plate Height	mm	440	
	General construction		double skin	
	Door/hood Construction		double skin	
	Tank construction		fully deep drawn	
	Tank volume	liter	30	
	Tank heating element	W	2500	
	Tank surface strainers		Yes-composite	
	Wash pump type		double flow	
	Wash pump power	W	1500	
	Wash temperature	°C	60	
	Boiler type		pressurized	
	Boiler volume	liter	6	
	Back-flow system		valve	
	Boiler heating element	W	8000	
	Rinse booster pump		no	
	Rinse booster pump power	W	-	
	Rinse temperature	°C	80	
	Rinse water consumption	Liter /rack	2,6	
	Optimal external water pressure	bar	2 - 4	
	Drain system		partial drain	
	Drain pump		standard built in	
	Rinse aid dispenser	peristaltic	YES	
	Detergent dispenser	peristaltic	YES	
	Wash cycle	sec	60 - 120 - 150 - continuous	
	Electric Power	W	9500	
	Electric Connection	V - ph - Hz	400V 3N 50Hz	
	Fuse	A	20	
	Plates racks	n° 1	70180	
	Flat Rack	n° 1	70181	
	Cutterly Rack	n° 1	780081	
	Electric cable	n° 1	YES	
	Drain hose	n° 1	YES	
	Fill hose	n° 1	YES	

A		Ø 32 mm
B		G 3/4"
C		Power supply

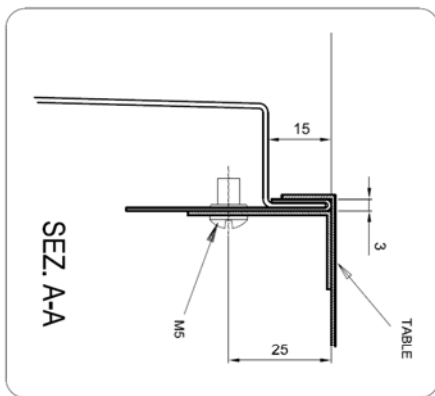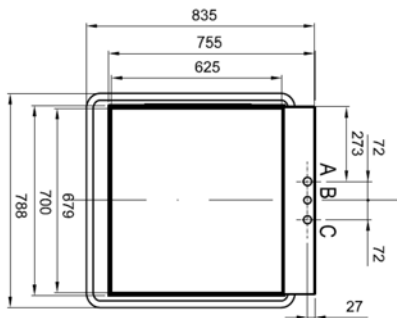

* LUCE UTILE PER CESTELLO
USEFUL SPACE FOR BASKET
LUMIERE OUTIL POUR PANIER
NUTZBARE OFFNUNG FÜR KORBE
ABERTURA UTIL PARA CESTO

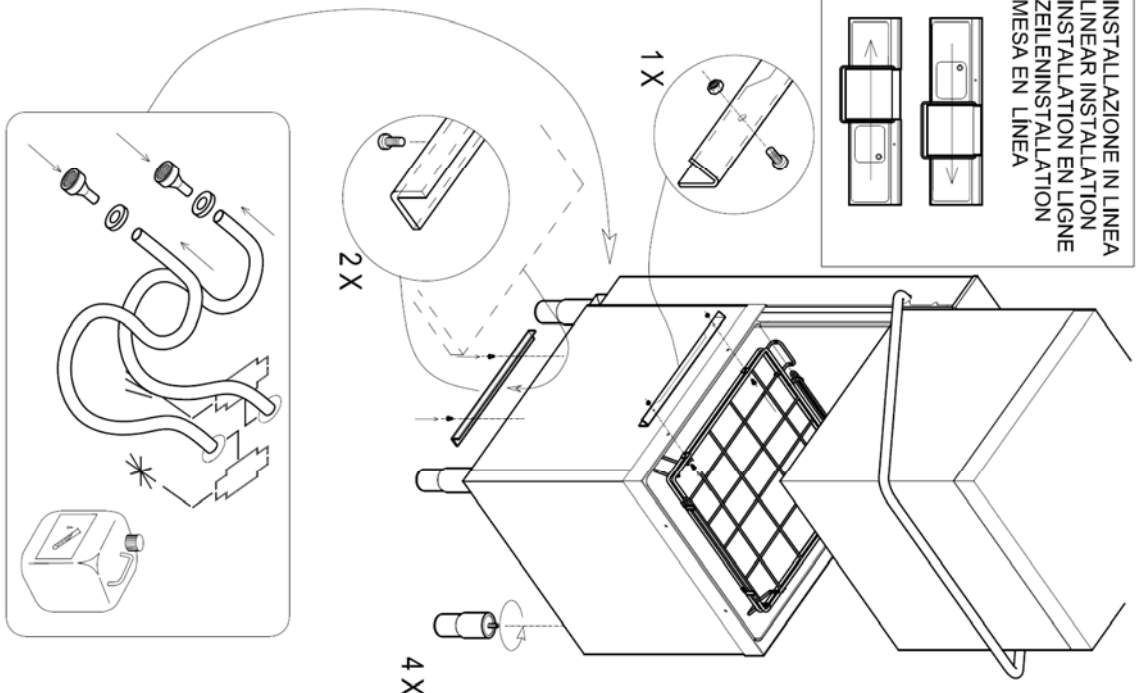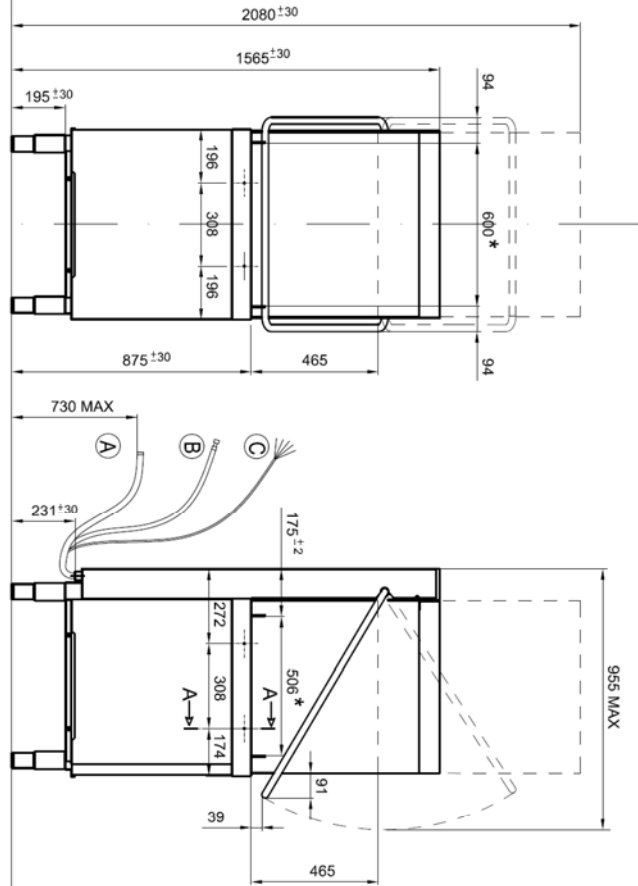

Installation layout	Hood type with drain pump	70991 02
Designed by: M. PUCI	Date: 03.12.2013	Denomination:
		Code: Rev:

