


		Model	LV2535_1	
		Code Production	918777	
	Overall Dimension (Width-Depth-Height) *open		mm	401x490 (765*)x595
	Packaging Dimension (WxDxH)		mm	470x560x740
	Gross weight		Kg	30
	Net weight		Kg	27
	Volume		mc	0,19
	Rack size		mm	350x350
	Max door /hood opening		mm	260
	Max glasses/plate Height		mm	250
	General construction			single skin
	Door/hood Construction			double skin
	Rack's drives construction			embossed
	Tank construction			welded
	Tank volume		liter	7
	Tank heating element		W	600
	Tank surface strainers			Yes- composite
	Wash pump type			single flow
	Wash pump power		W	150
	Wash temperature		°C	60
	Boiler type			pressurized
	Boiler volume		liter	2,6
	Back-flow system			Valve
	Boiler heating element		W	2.600
	Rinse booster pump			NO
	Rinse booster pump power		W	-
	Rinse temperature		°C	80
	Rinse water consumption		Liter /rack	1,8
	Optimal external water pressure		bar	2
	Drain system			overflow
	Drain pump			optional
	Rinse aid dispenser		peristaltic	YES
	Detergent dispenser		peristaltic	optional
	Wash cycle		sec	120
	Electric Power		W	3.500
	Electric Connection		V - ph - Hz	230V 1N 50Hz
	Fuse		A	16
	Water softner			NO
	Plates racks		n°-	NO
	Flat Rack		n°2	780138
	Cutterly Rack		n°1	780139
	Support for saucers		n°1	712020
	Electric cable		n°1	YES
	Drain hose		n°1	YES
	Fill hose		n°1	YES



		Model	LV2535BD_1	
		Code Production	918779	
	Overall Dimension (Width-Depth-Height) *open		mm	401x490 (765*)x595
	Packaging Dimension (WxDxH)		mm	470x560x740
	Gross weight		Kg	30
	Net weight		Kg	27
	Volume		mc	0,19
	Rack size		mm	350x350
	Max door /hood opening		mm	260
	Max glasses/plate Height		mm	250
	General construction			single skin
	Door/hood Construction			double skin
	Rack's drives construction			embossed
	Tank construction			welded
	Tank volume		liter	7
	Tank heating element		W	600
	Tank surface strainers			Yes- composite
	Wash pump type			single flow
	Wash pump power		W	150
	Wash temperature		°C	60
	Boiler type			pressurized
	Boiler volume		liter	2,6
	Back-flow system			Valve
	Boiler heating element		W	2.600
	Rinse booster pump			NO
	Rinse booster pump power		W	-
	Rinse temperature		°C	80
	Rinse water consumption		Liter /rack	1,8
	Optimal external water pressure		bar	2
	Drain system			partial drain
	Drain pump			standard built in
	Rinse aid dispenser		peristaltic	YES
	Detergent dispenser		peristaltic	optional
	Wash cycle		sec	120
	Electric Power		W	3.500
	Electric Connection		V - ph - Hz	230V 1N 50Hz
	Fuse		A	16
	Water softner			NO
	Plates racks		n°-	NO
	Flat Rack		n°2	780138
	Cutterly Rack		n°1	780139
	Support for saucers		n°1	712020
	Electric cable		n°1	YES
	Drain hose		n°1	YES
	Fill hose		n°1	YES

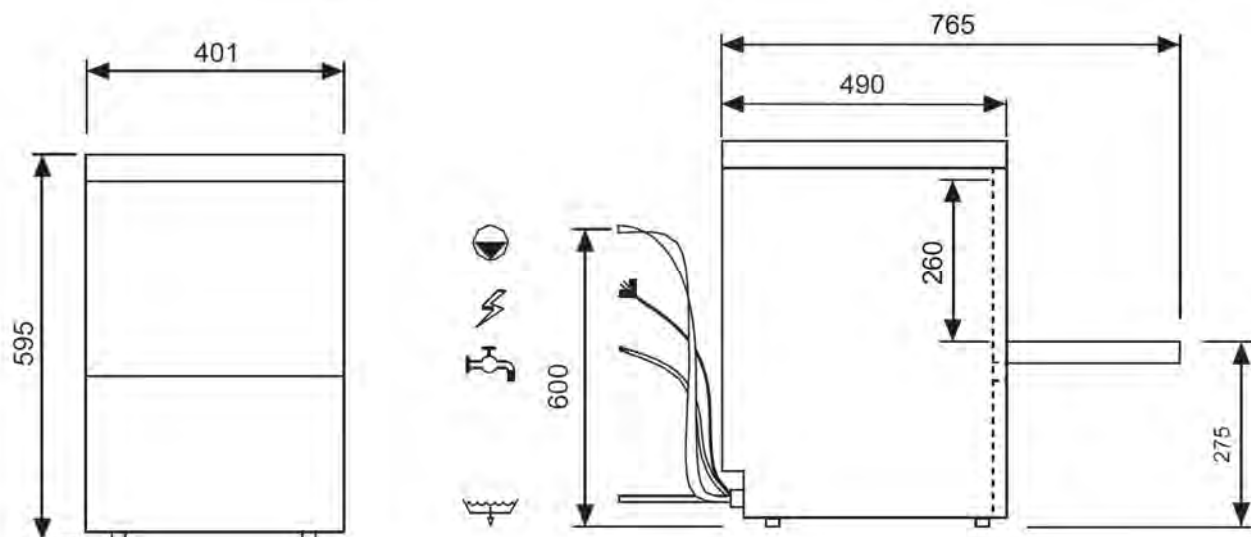