


VIP1330 ¼ T – VIP1490 ¼ T – VIP1740 ¼ T – VIP1980 ¼ T – VIP2300 ¼ T

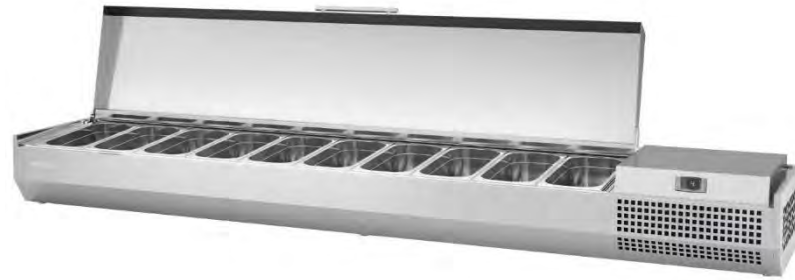

VP + 1/4

FORTALEZAS / STRENGTHS / FORCES

- ✓ Mayor precisión en el control de la temperatura
- ✓ Mayor capacidad.
- ✓ Cristal panorámico sin marco para mayor visibilidad del producto.
- ✓ Greater precision in temperature control.
- ✓ Larger capacity.
- ✓ Frameless panoramic glass for greater product visibility.
- ✓ Plus grande précision dans le contrôle de la température.
- ✓ Une plus grande capacité.
- ✓ Verre panoramique sans cadre pour une meilleure visibilité des produits.

VIP1330 ¼ T – VIP1490 ¼ T – VIP1740 ¼ T – VIP1980 ¼ T – VIP2300 ¼ T

		VIP1330 ¼ T – VIP1490 ¼ T – VIP1740 ¼ T – VIP1980 ¼ T – VIP2300 ¼ T					
Rango Tª / Operating temp / Régime de Température		-1ºC / +7ºC					
Clase climática / Climate class / Classe climatique		3 (25ºC, 60%HR)					
Capacidad / Capacity / Capacité (l)		32					
		37					
		48					
		57					
		70					
Medidas exteriores LxFxA / Overall dimensions LxDxH / Dimensions extérieures LxIxH (mm)		1.328 x 353 x 260					
		1.493 x 353 x 260					
		1.733 x 353 x 260					
		1.976 x 353 x 260					
		2.300 x 353 x 4					
Características constructivas / Cabinet Construction / Caractéristiques du fabricant							
Material exterior / Exterior Material / Matériau extérieur		Acero inoxidable AISI 304	AISI 304 Stainless Steel	Acier Inoxydable AISI 304			
Material interior / Interior Material / Matériau intérieur		Acero inoxidable AISI 304	AISI 304 Stainless Steel	Acier Inoxydable AISI 304			
Características del interior / Interior Construction / Caractéristiques intérieures		Fondos embutidos, uniones de amplio radio.	Pressed inner guides, rounded interior corner	Fonds emboutis, intérieur bords arrondis à large rayon			
Desagüe / Drain / Vidange		✓					
Iluminación LED / LED lighting Eclairage LED		✓					
Tipo aislamiento / Insulation / Type d'isolation		Poliuretano con densidad 40kg/m3, libre CFCs, cero ODP y bajo GWP	Polyurethane with high density 40kg/m3, CFCs free, zero ODP and low GWP	Isolation en polyuréthane injecté à haute pression de CFC avec une densité de 40kg/m³ , Zéro ODP et GWP faible.			
Espesor aislamiento / Insulation thickness / Epaisseur de l'isolation (mm)		70					
Espumante / Blowing Agent / Mousse		HFO					
Número de cubetas ½ - ¼ / Number of buckets ½ - ¼ / Nombre de cuvettes ½ - ¼		MODELO	VIP1330	VIP1490	VIP1740	VIP1980	VIP2300
		1/2	1	-	1	1	1
		1/4	3	6	5	7	9
		Características técnicas / Technical characteristics / Caractéristiques techniques					
Controlador / Thermostat / Thermostat Desescarche / Defrost / Dégivrage		Controlador digital Manual	Digital controller Manual	Contrôleur électronique Manuel			
Dispositivo expansión / Expansion Device / Détendeur		Capilar	Capillary	Capillaire			
Nivel sonoro / Sound level / Niveau de bruit		< 70 dB					
Refrigerante / Refrigerant / Gaz réfrigérant		R600a 40					

Carga / Ref amount / Charge de gaz (gr)

45

50

www.infrico.com

info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso


We reserve the right to change specifications without prior notice

Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



	55
	60
Tensión/fases/frecuencia / Power Supply / Tension /phase/Fréquence	230V / 1 / 50 Hz
Potencia frigorífica / Refrigeration Capacity / Puissance frigorifique (W)	169
Potencia / Power / Puissance (W)	111
	1,33
Consumo / Energy Consumption / Consommation (kWh/24h)	1,36
	1,39
	1,41
	1,44
Paletización / Crating / Palettisation	
Medidas paletización LxFxA / Crated dimensions / Dimensions palettisation L x l x H (mm)	1.408 x 400 x 405
	1.600 x 400 x 405
	1.814 x 400 x 405
	2.080 x 400 x 405
	2.390 x 400 x 405
Volumen bruto / Crated volume / Volume brut (l)	211
	237
	275
	314
	365
Peso bruto / Weight / Poids brut (kg)	46
	54
	60
	62
	66
Opcionales / Options	
	115 V / 1 ph / 60Hz
	115 V / 1 ph / 60Hz
	115 V / 1 ph / 60Hz
	220 V / 1 ph / 60 Hz
	220 V / 1 ph / 60 Hz
	220 V / 1 ph / 60 Hz

VIP1330 ¼ T – VIP1490 ¼ T – VIP1740 ¼ T – VIP1980 ¼ T – VIP2300 ¼ T

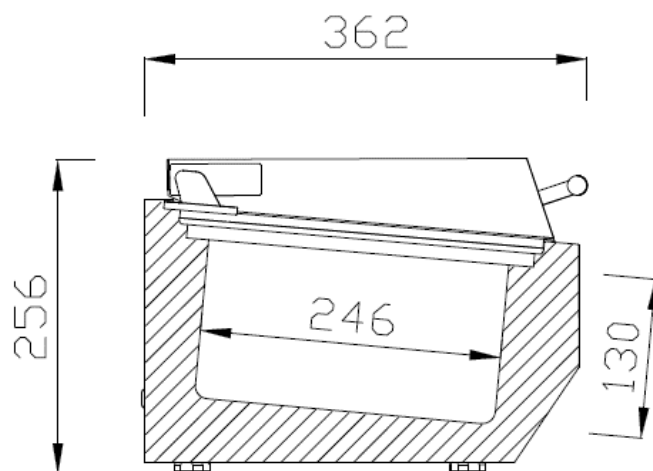

FICHA TÉCNICA / DATA SHEET / FICHE TECHNIQUE

VITRINA PARA PIZZA Y SANDWICHES, CUBAS ¼ / REFRIGERATED PIZZAS & SANDWICHES CASES, ¼ TRAYS / VITRINE INGRÉDIENTS PIZZAS & SANDWICHES 1/4




Rev: 31/05/2022


VIP1330 ¼ C – VIP1490 ¼ C – VIP1740 ¼ C – VIP1980 ¼ C – VIP2300 ¼ C

CONEXIONES / CONNECTION / CONNEXIONS

CAJA ELÉCTRICA / DRAINAGE / DRAINES

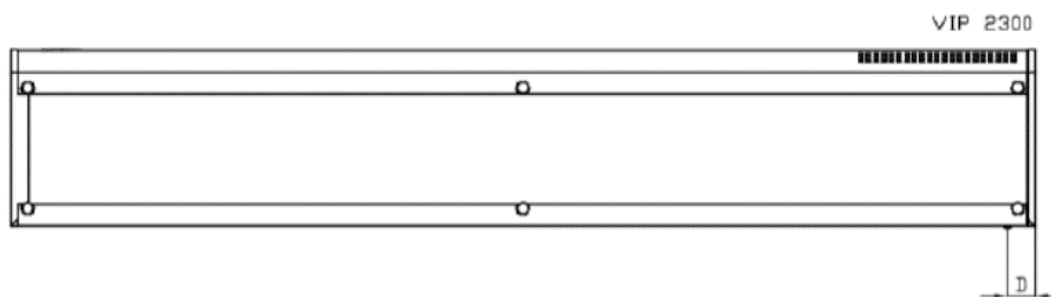

PATAS – RUEDAS / FOOT – WHEELS POSITION / PATTES ROULES

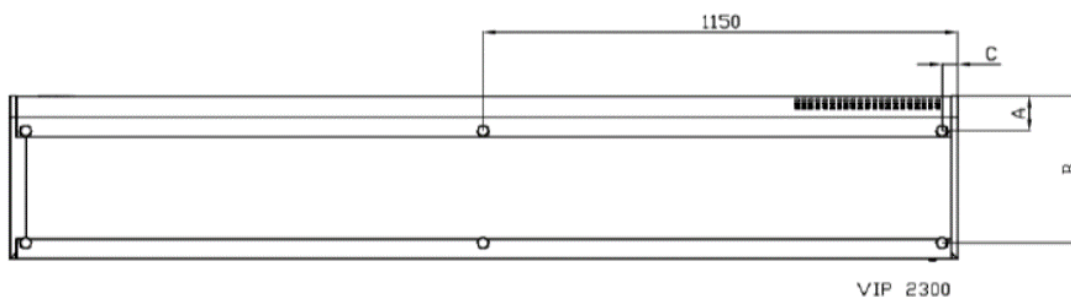

MODELO	VIP1330+	VIP1490+	VIP1740+	VIP1980+	VIP2300+
A (mm)	238	238	238	238	238
B (mm)	845	845	845	845	845
C (mm)	51	51	51	51	51
D (mm)	947	660	660	660	660

www.infrico.com

info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso

We reserve the right to change specifications without prior notice

Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis

