

Frente mostrador / Back-bar counter refrigerator / Desserte arrière bar positive cafétéria

Frente mostrador refrigerado preinstalado / Remote back-bar counter refrigerator / Desserte arrière bar groupe à distance cafétéria



Modelo / Modèle	FMP1500 II	FMP2000 II	FMP2500 II	FMP1500 CR	FMP2000 CR	FMP2500 CR	FMP1500 GR	FMP2000 GR	FMP2500 GR
Medidas Measures [mm]	1468 x 600 x 1050 mm.	1960 x 600 x 1050 mm.	2452 x 600 x 1050 mm.	1468 x 600 x 1050 mm.	1960 x 600 x 1050 mm.	2452 x 600 x 1050 mm.	1240 x 600 x 1050 mm.	1732 x 600 x 1050 mm.	2224 x 600 x 1050 mm.
Temperatura Temperature [°C]	-2°C/+8°C			+2°C/+6°C			0°C/+6°C		
Clase Climática Climatic class [°C]	5 / 40°C			4 / 38°C			-		
Tensión/Frecuencia Electrical data	230V/1ph/50Hz								
Controlador Controller	Digital IP65								
Material Material [EXT/INT]	Inox AISI 304								
Espesor Thickness [mm]	70								
Aislamiento Isolation [mm]	40kg/m ³ / Free CFC's / Zero ODP-GWP								
Capacidad Capacity [L]	340	520	690	340	520	690	340	520	690
Puertas Doors	2	3	4	2	3	4	2	3	4
Nº parrillas / Guías Nº shelves / Slides Nº de grilles / Glissière	4/4 [325x430]	6/6 [325x430]	8/8 [325x430]	4/4 [325x430]	6/6 [325x430]	8/8 [325x430]	4/4 [325x430]	6/6 [325x430]	8/8 [325x430]
Sistema de frío Cooling System	Monoblock ventilado / Forced air monoblock / Monoblock ventilé						-		
Desescarche Defrost	Parada compresor / Compressor off / Arrêt du compresseur								
Expansión Expansion	Capilar / Capillary / Capillaire						Válvula expansión opcional (especificar refrigerante) Expansion valve optional (specify refrigerant) Détendeur options (spécifier le gaz)		
Potencia Power [W]	209	308		377	382	387	-		
Potencia frig. Cooling capacity [W A -10°C]	370	690				Recom. 370	Recom. 690		
Consumo Consumption [kWh/24h]	1,55	2,06	2,35	-					
Clase energética Energy class	A	A	A	-					
Refrigerante Refrigerant	R-290								
Opcional Optional Options	Juego de guías / Slides / Jeu de Glissières [GUIAC0115430, GUIAC0215430]			Parrilla / Wire shelf / Grille [502X07]			Cerradura / Lock / Serrure [506X209; 506X210]		
	Parrilla doble tupida / Extradense wire shelf / Grille renforcée [502X43]			Cerradura / Lock / Serrure [506X60] [Mod. CR]			Iluminación Led RGB con cambio de color (por puerta) / Led lighting RGB change of colour (per door) / LED RGB avec changement de couleur (par porte)		
	Parrilla inoxidable / Stainless steel wire shelf / Grille Inox [502X49]			115V/1ph/60Hz			230V/1ph/60Hz		
	Kit cajones / Drawer Kit / Kit tiroirs FM 350 + FM 250 [JCAJ17FM3525] BM 2 x 1/2x200 + 1 x 1/3x100 [JCAJ17FM1/2] BM 2/3 x 300 [JCAJ17FM2/3]			-			Kit cajones / Drawer Kit / Kit tiroirs FM 350 + FM 250 [JCAJ17FM3525] BM 2 x 1/2x200 + 1 x 1/3x100 [JCAJ17FM1/2] BM 2/3 x 300 [JCAJ17FM2/3]		
	Tolva / Coffe grounds hopper / Tiroir marc à café [TOL17FM] Grupo lado contrario / Group opposite side / Groupe opposé [L]						Válvula expansión opcional (especificar refrigerante) Expansion valve optional (specify refrigerant) Détendeur options (spécifier le gaz)		



Serie / Series / Série **800**

+Info: www.infrico.com



22cm
Posibilidad de acceso frontal y lateral para una mejor manipulación.
 Front and lateral access for better handling.
 Possibilité d'accès frontal et latéral pour une meilleur manipulation.

FMPP 2000 GR

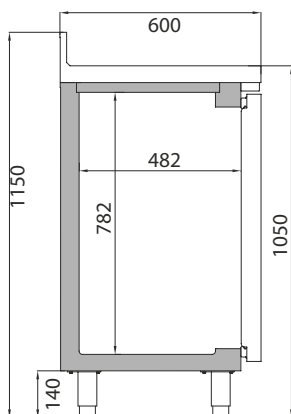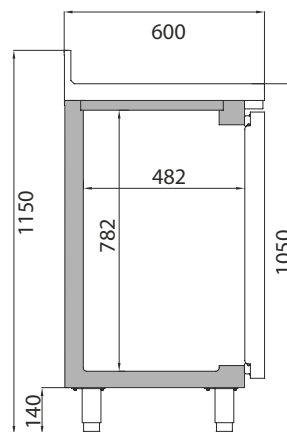



Toiva Opcional
 Coffe grounds hopper Optional
 Tiroir marc à café Options



FMPP 2000 CR

FM 250 302 x 418 x 255	1/3 302 x 418 x 105	
FM 350 302 x 418 x 352	1/2 302 x 418 x 205	2/3 302 x 418 x 307

Kit 2 cajones 2 drawers kit Kit 2 tiroirs	Kit 3 cajones 3 drawers kit Kit 3 tiroirs	Kit 2 cajones 2 drawers kit Kit 2 tiroirs
FM 350 + FM 250	2 x BM 1/2 x 200 1 x BM 1/3 x 100	BM 2 x 2/3 x 300

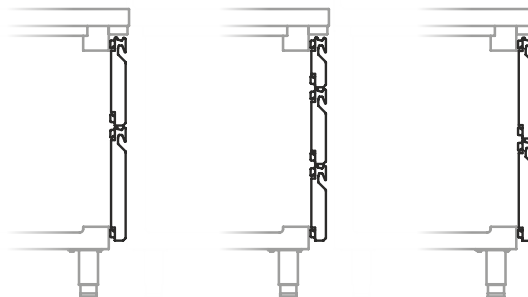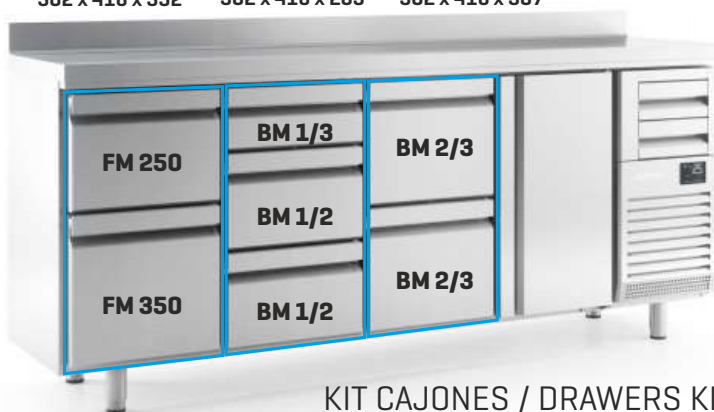

KIT CAJONES / DRAWERS KIT / KIT TIROIRS (MOD. II - GR)