

# Mural refrigerada grupo incorporado cerrada

## Plug in refrigerated doors multideck

### A DESTACAR



Mueble vertical de refrigeración con puertas batientes de cristal doble sin serigrafía y grupo incorporado. Vidrio templado y bajo emisivo.

#### Bisagra oleodinámica

- Apertura con cierre automático
- Máxima visibilidad de producto.
- Control electrónico.
- Iluminación LED en visera color 4000K.

#### 5 niveles de exposición:

- 4 estantes
- Cuba

Estantes regulables inclinables con portaprecios.  
Laterales display.

### BENEFITS

Plug in vertical refrigeration cabinet with hinged double glaze doors without screen printing. Toughened low E glasses.


#### Oligodynamic Hinge:

- Opening with automatic closing
- Maximum product visibility.
- Electronic control.
- LED lighting 4000k color in canopy.

#### 5 exposure levels:

- 4 shelves
- Exposition deck

Tilttable adjustable shelves with prize-holder.  
Display end panels.

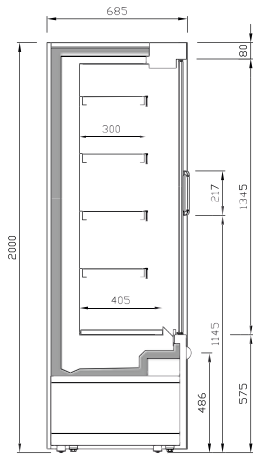

Sección comercial  
Commercial section



### Dimensiones Dimensions

#### Medidas / measure

- 685 x 2000 x [\*\* L + 40 + 40 mm.]

#### Estantes / shelves

- 300 mm.

#### Exposición / exposition deck

- 405 mm.

#### Espesor laterales / end panel thickness

- 40 mm.

### Rango de Temperatura ISO23953 Temperature Range ISO23953

	Tº Producto / Product Tº	Tº Aplicación / Application Tº
<b>M1</b>	-1°C / +5°C	0°C / +2°C
<b>M2</b>	-1°C / +7°C	+2°C / +4°C

MS18DCIM2

Exterior e interior Acero Inox  
Stainless Steel external and internal

Clase climática 3 / Climatic class 3  
25°C / 60% HR

### Datos Técnicos / Technical Data

Modelo Model	Longitud** Length**	Laterales End panel	TDA/m	Area refrigerada Refrigerated Area	Volumen refrigerado Refrigerated volume	Potencia frigorífica [-15°C] Heat extraction rate [-15°C]	Compresor Compressor	Nº Estantes Shelves	Datos eléctricos Electrical data	Refrigerante Refrigerant
	mm	mm		m²	litros	W	HP		V / Hz	
<b>MS9DCIM1</b>	938	40+40	1,07	1,51	342	906	5/8	4	230V / 50Hz	R-452A
<b>MS12DCIM1</b>	1250	40+40	1,43	2,01	455	906	5/8	4	230V / 50Hz	R-452A
<b>MS18DCIM1</b>	1875	40+40	2,15	3,01	683	1262	1	4	230V / 50Hz	R-452A
<b>MS9DCIM2</b>	938	40+40	1,07	1,51	342	631	1/2	4	230V / 50Hz	R-452A
<b>MS12DCIM2</b>	1250	40+40	1,43	2,01	455	883	1/2	4	230V / 50Hz	R-452A
<b>MS18DCIM2</b>	1875	40+40	2,15	3,01	683	1315	5/8	4	230V / 50Hz	R-452A