

Semimural cerrada refrigerada grupo remoto

Closed refrigeration lowmultideck remote group

Serie
SMDG
Series

A DESTACAR



Mueble semivertical de refrigeración cerrado con puertas correderas de cristal doble totalmente transparentes. Visibilidad total del producto expuesto para la venta. Iluminación LED.

4 niveles de exposición:

- ☛ 3 estantes
- ☛ Cuba

Estantes regulables inclinables.

Portaprecios 40 mm en estantes y cuba.

Flexibilidad de implantación: Un solo mueble para todos los regímenes de temperatura.

BENEFITS

Lowmultideck refrigeration case with double glazed and transparent sliding doors.

Toughened Low E glasses

Maximum product visibility.

LED lighting cold white color.


4 exposure levels

- ☛ 3 shelves
- ☛ Exposition deck

Tilttable adjustable shelves.

Prize-holder 40 mm. on shelves and exposition deck.

Implementation flexibility: A single piece of furniture for all temperature range.

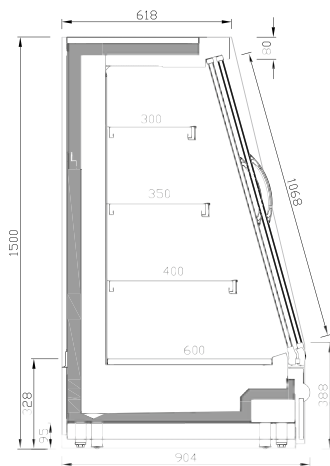

Sección comercial
Commercial section



SML25DG15

Dimensiones / Dimensions

Medidas / measure

- ☛ 904 x 1500 x ** L mm.

Longitud / length

- ☛ [**L] = 1250 / 1875 / 2500 / 3750 mm.

Estantes / shelves

- ☛ 300-350-400 mm.

Exposición / exposition deck

- ☛ 600 mm.

Espesor laterales / end panel thickness

- ☛ 40 mm.

Clase climática 3 / Climatic class 3

- ☛ 25°C / 60% HR

Datos eléctricos / Electrical data

- ☛ 230V / 50-60Hz



Refrigerante / Refrigerant

- ☛ R-449A
- ☛ Glycol, CO2 (options)

Modelos Disponibles / Available Models

- SML12DG15
- SML18DG15
- SML25DG15
- SML37DG15

Datos Merchandising [x metro] / Merchandising Data [x meter]

TDA/m	Área refrigerada / Refrigerated area/m ²	Volumen refrigerado/m / Refrigerated volume/m ³
0,99	1,65	389

Rango de Temperatura ISO23953 / Temperature Range ISO23953

	Ta Producto / Product Ta	Ta Aplicación / Application Ta
M1	-1°C / +5°C	0°C / +2°C

