

Máquina enfriacopas FREEZE

· Professional use ·



- Gracias a su diseño, la FREEZE es perfecta para cualquier local ya que se adapta a todo tipo de superficies, ocupando el mínimo espacio.
 - Se puede ubicar donde se precise según las necesidades de cada ocasión.
 - Perfecta para negocios de mucha actividad.
 - Fabricado en acero inoxidable.
 - Conexión a botella de CO₂ de 28 ó 36 Kg.
 - Contador de operaciones.
 - Luces tipo LED de activación por impulsos de gas.
 - Sistema de conexión a botella con sistema de seguridad incluido.
- Thanks to its design, the FREEZE is perfect for any local adapts to all types of surfaces, taking up a minimum of space.
 Can be placed where required according to the needs of each occasion.
 Perfect for busy business.
 Made of steel stainless.
 Connection to CO₂ bottle of 28 or 36 Kg.
 Counter operations.
 Lights activation type LED by impulses from gas.
 Bottle with safety system including system.



Precios NO sujetos al sistema de descuentos habitual de LACOR
 Prix non soumis au système habituel de remises de LACOR
 Prices not subject to the usual discount system of LACOR

Máquina enfriacopas FREEZE

Machine à givrer les verres

Gläser-Kühlmaschine


Glass cooler machine

Máquina para enfriar copas

Ref	W	U.Venta
69300	25	1

Ref	Tensión/Voltage	Potencia/Power	Programas/Program.	Dimensiones/Sizes	Peso/Weight
69300	220-240 V; 50/60 Hz	25 W	4	22,8x30,5x 50 cm	12 Kg

PRAXAIR

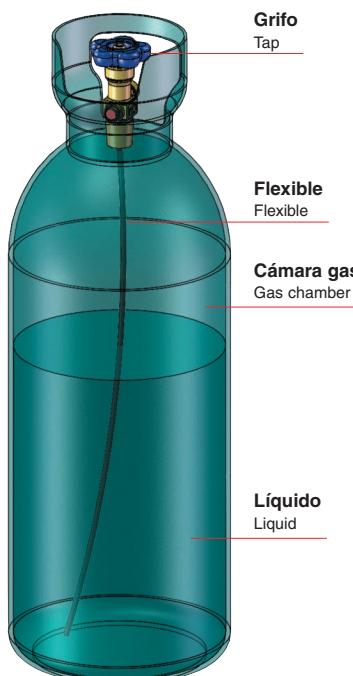

¿Qué tipo de gas utilizamos?

El gas que utilizan nuestras máquinas es Gas carbónico alimentario en estado líquido. El Dióxido de Carbono, también denominado óxido de carbono (IV), gas carbónico y anhídrido carbónico, CO₂, es insípid, incoloro, inodoro y no inflamable. Aunque la forma más común en que se encuentra el CO₂ es en estado gaseoso, bajo determinadas condiciones se puede encontrar también en estado líquido o sólido. Estas botellas están destinadas para uso médico y alimentario y lo que las diferencia del resto es que en su interior cuenta con una sonda que extrae el líquido criogénico que al liberarse alcanza una temperatura de -79,8 °C

Seguridad LACOR

- Funcionamiento a base de gas carbónico líquido alimentario
- Control de presión de gas. Control de temperatura de congelación del gas ajustable de -8 a -55 °C
- Fabricado en Acero Inoxidable de uso médico y alimentario. Todos los conductos interiores están fabricados en AISI-316 garantizando las óptimas condiciones alimentarias y higiénico-sanitarias
- Adaptable a cualquier tamaño de copa o vaso
- Exclusivo sistema de seguridad patentado y control para presiones superiores a 100 bar

Nuestros artículos cumplen las siguientes normativas:

- Directiva 2006/95/CE de seguridad eléctrica
- Directiva 2006/108/CE de compatibilidad electromagnética
- Directiva 2006/42/CE de máquinas
- Norma UNE-EN ISO 12100-1:2004
- Norma UNE-EN ISO 12100-2:2004
- Norma EN 614-1:1996
- Norma UNE-EN ISO 13850:2007
- Norma UNE-EN 60335-1

What type of gas do we use?

Our machines use liquid food grade Carbon dioxide gas. Carbon Dioxide, also called carbon oxide (IV), carbonic gas and carbon anhydride, CO₂, is insipid, colourless, odourless and not flammable.

Although the most common state of CO₂ is gaseous, under certain conditions it can also be found in liquid or solid state. These bottles are used for medical and food uses and they are different from the rest in that their interiors have a probe that extracts the cryogenic liquid which when freed reaches temperatures of -79.8 °C

LACOR Safety

- Operability based on liquid food grade carbon dioxide gas
- Control of gas pressure. Control of freezing temperature of the gas adjustable from -8 to -55 °C
- Manufactured from Stainless Steel for medical and food use. All the internal conducts are manufactured from AISI-316 guaranteeing optimal food and hygienic-health condition
- Adaptable to any size of glass
- Exclusive patented safety system and control for pressures above 100 bar

Our articles fulfil the following standards:

- Directive 2006/95/CE for electrical safety
- Directive 2004/108/EC for electromagnetic compatibility
- Directive 2006/42/CE for machinery
- UNE-EN ISO 12100-1:2004 Standard
- UNE-EN ISO 12100-2:2004 Standard
- EN 614-1:1996 Standard
- UNE-EN ISO 13850:2007 Standard
- UNE-EN 60335-1 Standard

