

series pratika 900
type fry top gas / gas griddles
model PK 90/... FT..SG...

PK 90/40 FTGS-T	PK 90/80 FTGS-CR-T
PK 90/40 FTGS	PK 90/80 FTGS-CR
PK 90/40 FTGS-P	PK 90/80 FTGS-CR-P
PK 90/40 FTGS-CR-T	PK 90/80 FTRGS-T
PK 90/40 FTGS-CR	PK 90/80 FTRGS
PK 90/40 FTGS-CR-P	PK 90/80 FTRGS-P
PK 90/40 FTRGS-T	PK 90/80 FTRGS-CR-T
PK 90/40 FTRGS	PK 90/80 FTRGS-CR-P
PK 90/40 FTRGS-P	PK 90/80 FTRRGS-T
PK 90/40 FTGRS-CR-T	PK 90/80 FTRRGS
PK 90/40 FTGRS-CR	PK 90/80 FTRRGS-P
PK 90/40 FTGRS-CR-P	PK 90/80 FTRRGS-CR-T
PK 90/80 FTGS-T	PK 90/80 FTRRGS-CR
PK 90/80 FTGS	PK 90/80 FTRRGS-CR-P
PK 90/80 FTGS-P	



Descrizione generale

Piano di lavoro in acciaio inox AISI 304, spessore 20/10. Saldatura ermetica delle piastre al piano per evitare interstizi. Piastre realizzate con superficie satinata o rivestita con cromo duro lucidato a specchio in esecuzione liscia, rigata o mista. Piastre inclinate di 10 mm per facilitare la raccolta dei grassi. Capacità del cassetto raccolta grassi di 1 lt nei modelli di larghezza 400 mm e 1,5 lt in quelli da 800 mm. Accensione del bruciatore pilota con accenditore piezoelettrico. Regolazione riscaldamento mediante rubinetto di sicurezza con termocoppia o valvola di sicurezza. Modelli cromati dotati di termostato di sicurezza.

+ Plus costruttivi

- Piano di lavoro in 20/10
- Piastre realizzate con superficie satinata o cromata, liscia, rigata o mista
- Piastre inclinate di 10 mm per facilitare la raccolta dei grassi

+ Plus prestazionali

- La raccolta dei grassi è facilitata dall'inclinazione della piastra e dalla canaletta di scolo presente sulla piastra

General description

Pressed working top in stainless steel AISI 304, 20/10 thick. Surface and cooking plate hermetically welded together in order to avoid gaps. Cooking plates in satin or glossy-chrome finishing, available with flat, grooved and ½ flat ½ grooved surfaces; 10 mm sloping surface to easily collect grease; 1 lt capacity grease collector on 400 mm width models and 1,5 lt capacity on 800 mm width models; Pilot burners with piezoelectric lighting. Gas regulation with safety tap equipped with thermocouple or safety valve. Chromed models equipped with safety thermostat.

+ Construction plus

- Working top in 20/10
- Cooking plates in satin or glossy-chrome finishing, available with flat, grooved and ½ flat ½ grooved surfaces
- 10 mm sloping surface to easily collect grease

+ Performance plus

- Sloping surface and drainage channel on the plate, to easily collect grease



series pratika 900
type fry top gas / gas griddles
model PK 90/... FT..SG...

dati tecnici technical data

	dimensioni <i>dimensions</i>	dim. piastra cottura <i>cooking plate dimension</i>	aspetto piastra <i>plate surface</i>	pot. gas <i>gas power</i>	controllo riscaldamento <i>type of gas supply</i>	connessione gas <i>gas connection</i>
	cm LxWxH	cm LxWxH	-	kW	-	"
PK 90/40 FTGS-T	40x90x25	31,5x61x15	liscia <i>flat</i>	7 kW	rubinetto <i>tap</i>	1/2"
PK 90/40 FTGS	40x90x87	31,5x61x15	liscia <i>flat</i>	7 kW	rubinetto <i>tap</i>	1/2"
PK 90/40 FTGS-P	40x90x87	31,5x61x15	liscia <i>flat</i>	7 kW	rubinetto <i>tap</i>	1/2"
PK 90/40 FTGS-CR-T	40x90x25	31,5x61x15	liscia <i>flat</i>	10,5 kW	valvola <i>valve</i>	1/2"
PK 90/40 FTGS-CR	40x90x87	31,5x61x15	liscia <i>flat</i>	10,5 kW	valvola <i>valve</i>	1/2"
PK 90/40 FTGS-CR-P	40x90x87	31,5x61x15	liscia <i>flat</i>	10,5 kW	valvola <i>valve</i>	1/2"
PK 90/40 FTRGS-T	40x90x25	31,5x61x15	rigata <i>grooved</i>	7 kW	rubinetto <i>tap</i>	1/2"
PK 90/40 FTRGS	40x90x87	31,5x61x15	rigata <i>grooved</i>	7 kW	rubinetto <i>tap</i>	1/2"
PK 90/40 FTRGS-P	40x90x87	31,5x61x15	rigata <i>grooved</i>	7 kW	rubinetto <i>tap</i>	1/2"
PK 90/40 FTRGS-CR-T	40x90x25	31,5x61x15	rigata <i>grooved</i>	10,5 kW	valvola <i>valve</i>	1/2"
PK 90/40 FTRGS-CR	40x90x87	31,5x61x15	rigata <i>grooved</i>	10,5 kW	valvola <i>valve</i>	1/2"
PK 90/40 FTRGS-CR-P	40x90x87	31,5x61x15	rigata <i>grooved</i>	10,5 kW	valvola <i>valve</i>	1/2"
PK 90/80 FTGS-T	80x90x25	31,5x61x15	liscia <i>flat</i>	14 kW	rubinetto <i>tap</i>	1/2"
PK 90/80 FTGS	80x90x87	31,5x61x15	liscia <i>flat</i>	14 kW	rubinetto <i>tap</i>	1/2"
PK 90/80 FTGS-P	80x90x87	31,5x61x15	liscia <i>flat</i>	14 kW	rubinetto <i>tap</i>	1/2"
PK 90/80 FTGS-CR-T	80x90x25	31,5x61x15	liscia <i>flat</i>	21 kW	valvola <i>valve</i>	1/2"
PK 90/80 FTGS-CR	80x90x87	31,5x61x15	liscia <i>flat</i>	21 kW	valvola <i>valve</i>	1/2"
PK 90/80 FTGS-CR-P	80x90x87	31,5x61x15	liscia <i>flat</i>	21 kW	valvola <i>valve</i>	1/2"

Per tutti i modelli eccetto -T: regolazione altezza 50 mm
 For all models exept -T: height regulation 50 mm

series
pratika 900

type
fry top gs simple / gas griddles simple

model
PK 90/... FT..G...



series pratika 900
type fry top gas / gas griddles
model PK 90/... FT..SG...


dati tecnici
technical data

	dimensioni <i>dimensions</i>	dim. piastra cottura <i>cooking plate dimension</i>	aspetto piastra <i>plate surface finishing</i>	pot. gas <i>gas power</i>	controllo riscaldamento <i>type of gas supply</i>	gas connection <i>connessione gas</i>
	cm LxWxH	cm LxWxH	-	kW	-	"
PK 90/80 FTRGS-T	80x90x25	2	1/2 liscia 1/2 rigata <i>1/2 smooth 1/2 ribbed</i>	14 kW	rub tap	1/2"
PK 90/80 FTRGS	80x90x87	2	1/2 liscia 1/2 rigata <i>1/2 smooth 1/2 ribbed</i>	14 kW	rub tap	1/2"
PK 90/80 FTRGS-P	80x90x87	2	1/2 liscia 1/2 rigata <i>1/2 smooth 1/2 ribbed</i>	21 kW	rub tap	1/2"
PK 90/80 FTRGS-CR-T	80x90x25	4	1/2 liscia 1/2 rigata <i>1/2 smooth 1/2 ribbed</i>	21 kW	valvola valve	1/2"
PK 90/80 FTRGS-CR	80x90x87	4	1/2 liscia 1/2 rigata <i>1/2 smooth 1/2 ribbed</i>	21 kW	valvola valve	1/2"
PK 90/80 FTRGS-CR-P	80x90x87	4	1/2 liscia 1/2 rigata <i>1/2 smooth 1/2 ribbed</i>	21 kW	valvola valve	1/2"
PK 90/80 FTRRGS-T	80x90x25	6	1/2 liscia 1/2 rigata <i>1/2 smooth 1/2 ribbed</i>	14 kW	rub tap	1/2"
PK 90/80 FTRRGS	80x90x87	6	1/2 liscia 1/2 rigata <i>1/2 smooth 1/2 ribbed</i>	14 kW	rub tap	1/2"
PK 90/80 FTRRGS-P	80x90x87	6	1/2 liscia 1/2 rigata <i>1/2 smooth 1/2 ribbed</i>	14 kW	rub tap	1/2"
PK 90/80 FTRRGS-CR-T	80x90x25	4	1/2 liscia 1/2 rigata <i>1/2 smooth 1/2 ribbed</i>	21 kW	valvola valve	1/2"
PK 90/80 FTRRGS-CR	80x90x87	4	1/2 liscia 1/2 rigata <i>1/2 smooth 1/2 ribbed</i>	21 kW	valvola valve	1/2"
PK 90/80 FTRRGS-CR-P	80x90x87	4	1/2 liscia 1/2 rigata <i>1/2 smooth 1/2 ribbed</i>	21 kW	valvola valve	1/2"

Per tutti i modelli eccetto -T: regolazione altezza 50 mm
For all models exept -T: height regulation 50 mm

series pratika 900
type fry top gas / gas griddles
model PK 90/... FT..SG...

schema d'installazione
installation diagram

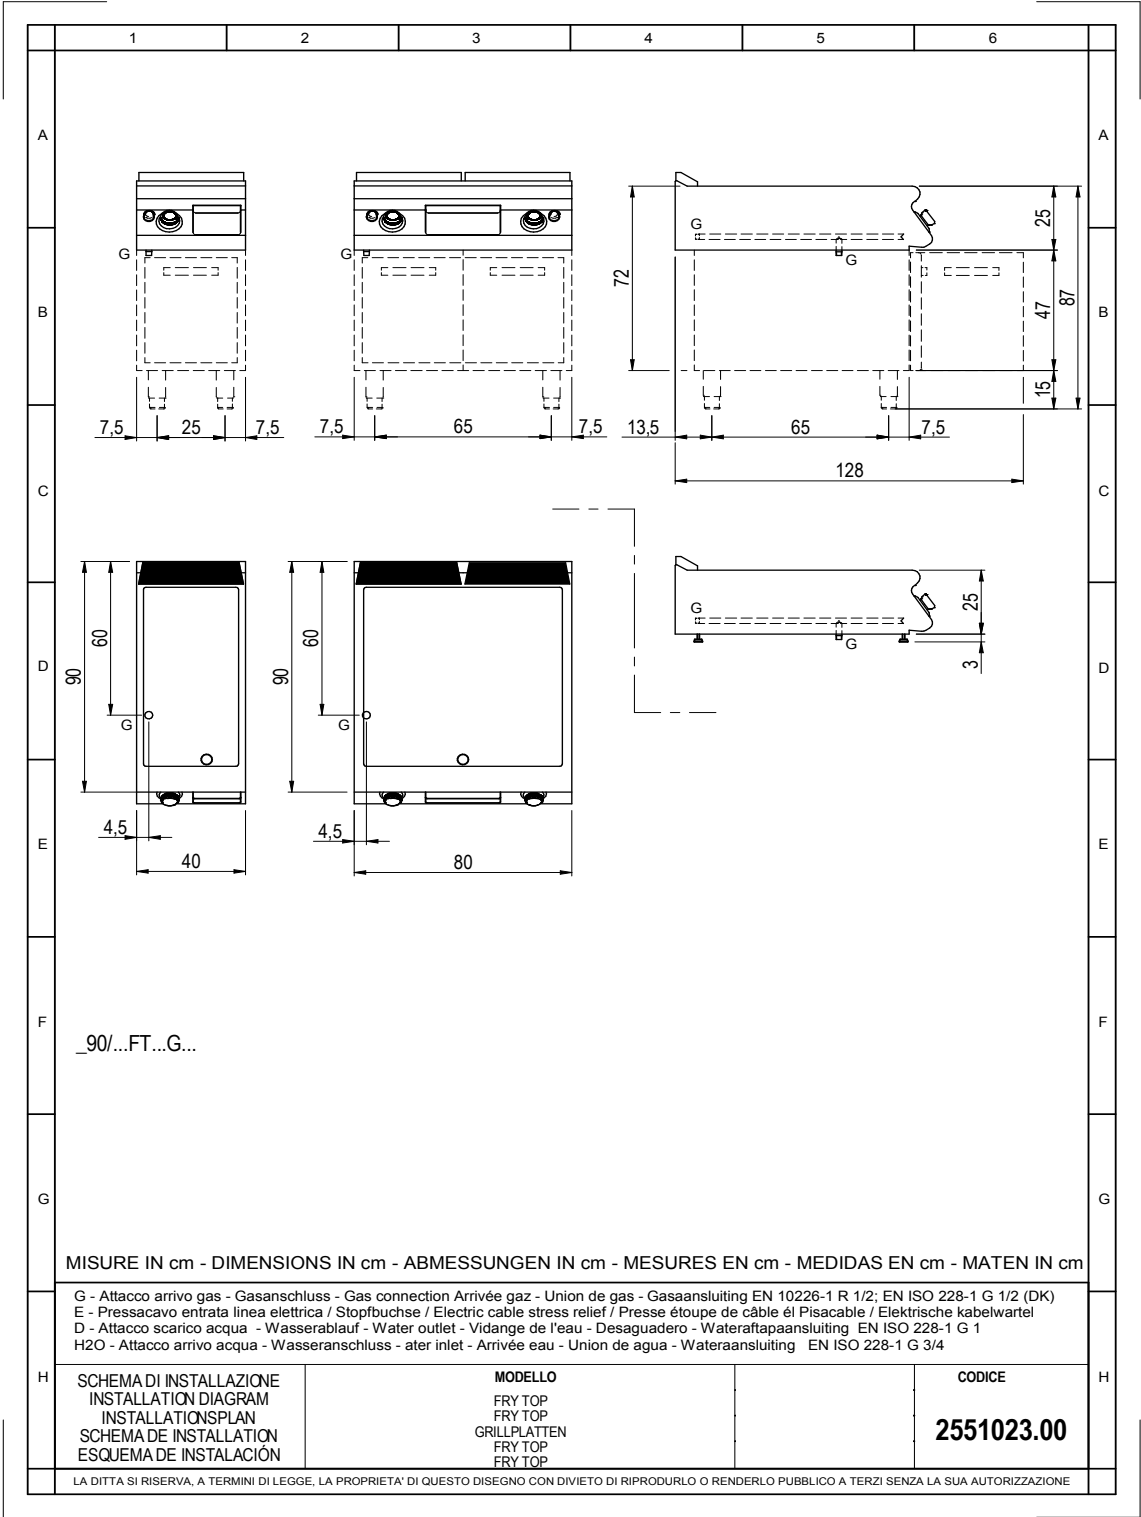

series
pratika 900

type
fry top gs simple / gas griddles

model
PK 90/ ... FT..G...

