

SP 010 P

SP 010 P

MODEL

SPIDOGLOSS SP010P

- **Black smooth surfaces**

- **Manual Control**

- **Max. temperature 400°C**

- **Glass ceramic**



DESCRIPTION

Professional Contact Cooking System with Glass Ceramic plates, suitable for cooking a wide array of different foods, as such: toast, sandwich, meat, fish, vegetables, eggs, etc. High quality cooking result thanks to heat distribution uniformity and use of shock resistance, non-stick, non-porous and impermeable to smells and tastes Glass Ceramic Cooking Surfaces.

High versatility of use thanks to **SHB™ Plus** technology which allows combined heating (contact + infrared) and high cooking Temperature setting.

Up to 60% saving in Preheating Time thanks to **SHB™ Plus**.

Up to 60% saving in Energy consumption thanks to the **Protek.Safe™** high efficiency insulation system which eliminates unnecessary energy loss.

STANDARD COOKING FEATURES

SETTINGS:

- Manual Control
- Temperature set: 120 °C – 400 °C.

STANDARD TECHNICAL FEATURES

- **Single Black Smooth Glass Ceramic cooking plate:**
1 250x250 mm.
- Stainless Steel Case
- Ergonomic Handle
- Self-looking Handle Bracket
- 4 Non-Slip Feets
- Removable Dip Tray
- ON/OFF button and LED light


ACCESSORIES

- **METAL SCRAPER**
Metallic scraper for Glass Ceramic Surfaces (included)
- **SPIDO CLEAN SPRAY DETERGENT**
750 ml Spray Detergent for Glass Ceramic and Steel Surfaces (to be purchased separately)



SP 010 P

Views
Connection positions
Dimensions and Weights
Installation requirements
Power supply

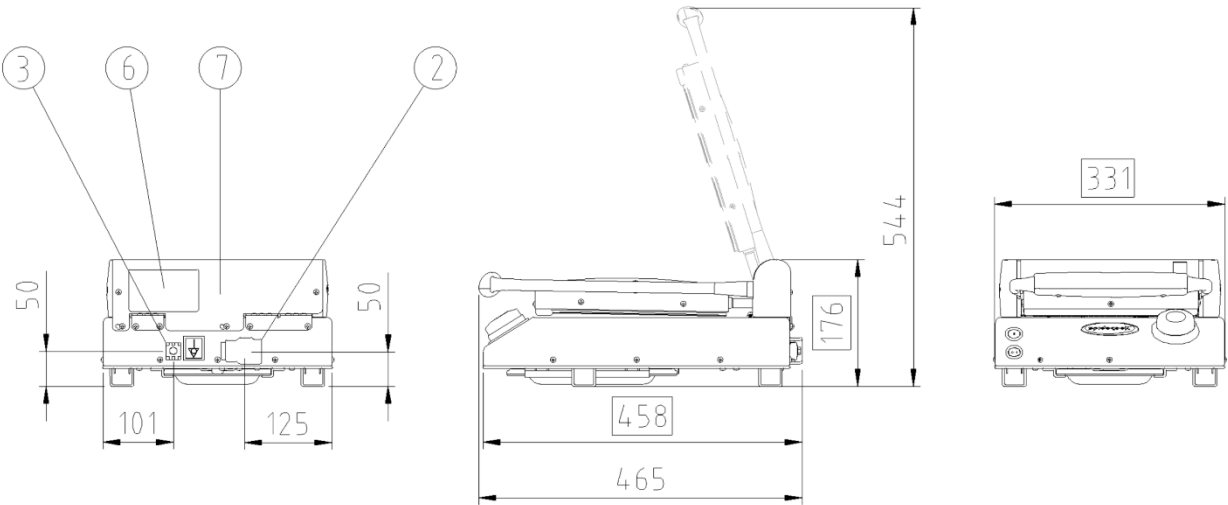

CONNECTION POSITIONS

2	Terminal board power supply
3	Unipotential terminal
6	Technical data plate
7	Safety thermostat

DIMENSIONS AND WEIGHT

Width	331 mm
Depth	458 mm
Height	176 mm
Net Weight	10 Kg

INSTALLATION REQUIREMENTS


Installations must conform to all local electrical systems, specifically minimum wire gauge required for field connection, hydraulic and ventilation codes.

POWER SUPPLY

	STANDARD
Voltage	230 V
Phase	1PH+N+PE
Cycle	50-60 Hz
Power	1.5 kW
Maximum Amp Draw	6,5 A
Power cable requirement	H07RN-F 3G 1.5 mm ²
Cord diameter	10 mm
Plug	SCHUKO

SP 010 P

Wiring diagrams

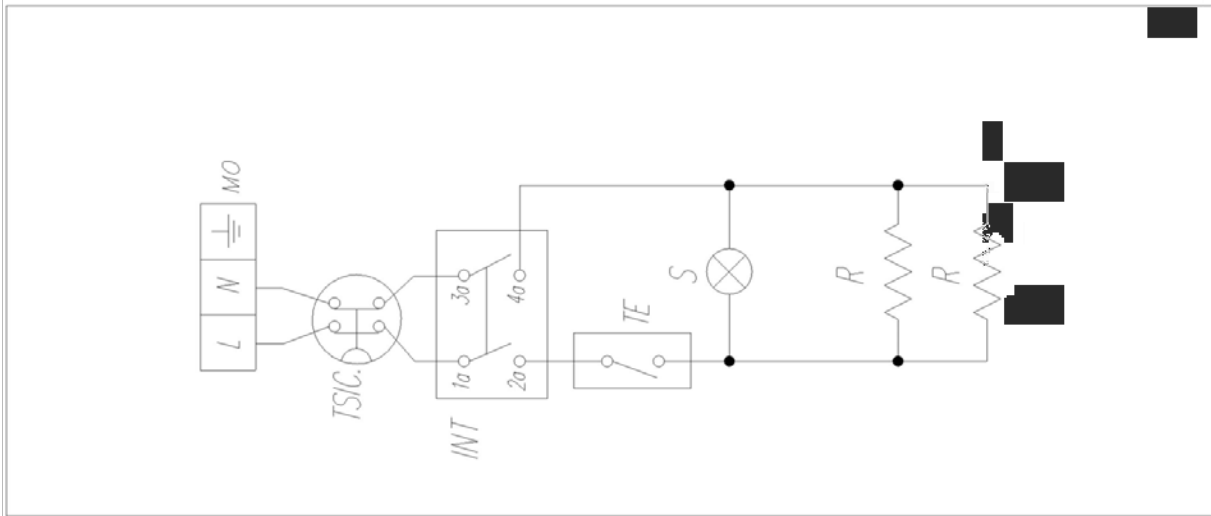

SP 015 PT

SP 015 PT

MODELLO SPIDOGLOSS SP015PT	Piani Trasparenti Lisci	Max. temperatura 400°C
	Controllo Manuale	Vetro Ceramica



DESCRIZIONE

Sistemi di cottura professionali a contatto con piani in vetroceramica, adatte per la cottura di un'ampia gamma di cibi diversi come : toast, panini , carne, pesce, verdure , uova , etc.

Elevata qualità della cottura grazie alla distribuzione uniforme del calore prodotto e all' uso di superfici di cottura in vetroceramica , materiale che offre alta resistenza agli shock termici, antiaderenza , non porosità e quindi impermeabilità ai sapori e agli odori .

Ampia versatilità d' uso grazie alla tecnologia **SHBTM Plus**, che garantisce un riscaldamento combinato (per contatto e per irraggiamento infrarosso) e la possibilità di raggiungere alte temperature di cottura (fino a 400°C).

Fino al 60 % di risparmio in Tempo di Preriscaldamento e fino al 60 % di risparmio in Consumi Energetici grazie al sistema di isolamento termico ad alta efficienza **Protek.SafeTM**, che elimina le perdite non necessarie di energia.

CARATTERISTICHE STANDARD COTTURA

CONTROLLO:

- Controllo Manuale
- Gamma Temperatura regolabile : 120° C – 400° C

CARATTERISTICHE TECNICHE STANDARD

- Piano cottura in vetroceramica singolo trasparente liscio**
1 x 300x400mm
- Struttura in Acciaio Inox AISI 304
- Impugnatura Ergonomica
- Maniglia superiore Auto-bloccante
- 4 piedini antiscivolo
- Cassetto raccogli liquidi e residui rimovibile
- Pulsante ON/OFF e Luce LED funzionamento


ACCESSORI

- RASCHIETTO METALLICO**
Raschietto metallico specifico per superfici in vetroceramica (incluso)
- DETERGENTE SPRAY SPIDO CLEAN**
Bottiglia Detergente Spray da 750 ml . appositamente sviluppato per superfici in vetroceramica e per struttura in acciaio
(da acquistare separatamente)



SP 015 PT

Viste
Connessioni
Dimensioni e Pesì
Specifiche Installazione
Dati Alimentazione

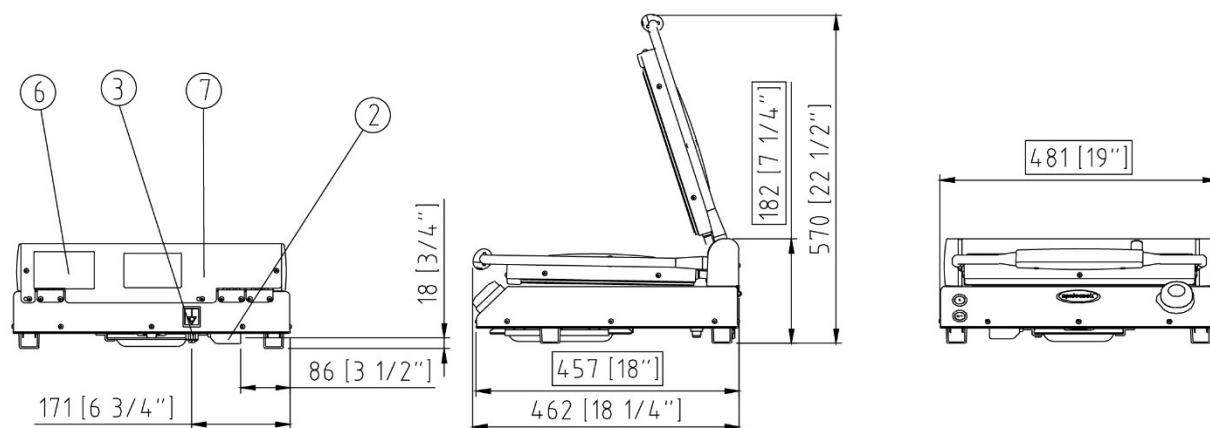

POSIZIONI DI CONNESSIONE

2	Morsettiera alimentazione
3	Morsetto Equipotenziale
6	Targhetta Dati Tecnici
7	Termostato di Sicurezza

DIMENSIONI E PESI

Larghezza	481 mm
Profondità	457 mm
Altezza	182 mm
Peso Netto	14,5 Kg

REQUISITI INSTALLAZIONE

L'installazione deve essere conforme a tutte le normative elettriche locali, in particolare alle sezioni minime dei cavi di collegamento, alle prese idrauliche e di ventilazione.


DATI TECNICI

	STANDARD
Tensione	230 V
Fase	1PH+N+PE
Frequenza	50 Hz
Potenza	2,8 kW
Corrente Max	12,5 A
Tipo Cavo Alimentazione	H07RN-F
Tipo Spina	SCHUKO

SP 015 PT

Schemi elettrici

SP 015 PT

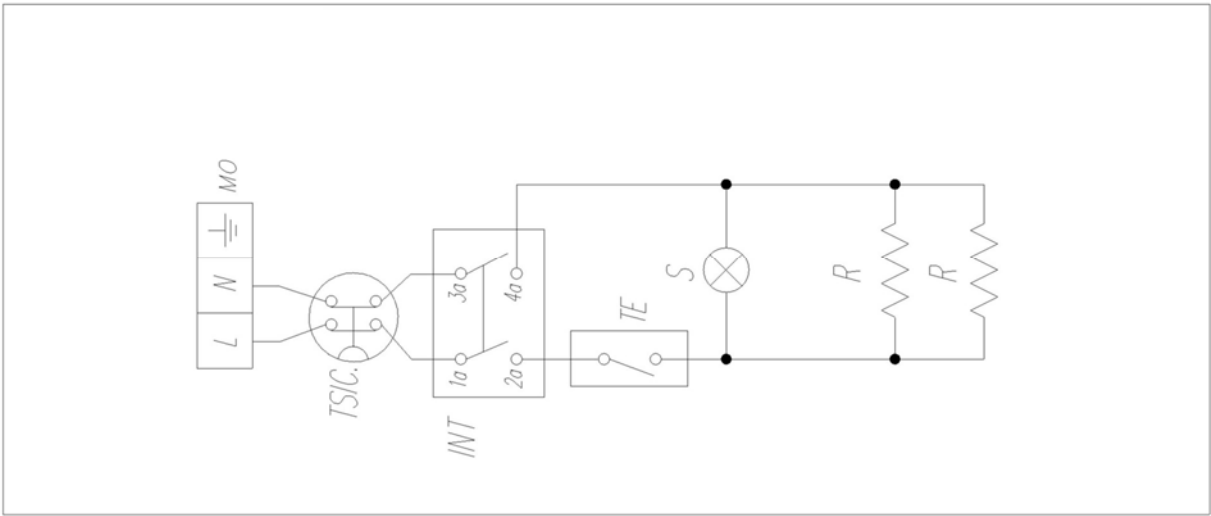

SCHEMI ELETTRICI	
INT	Interruttore
MO	Morsettiera
R	Resistenza
S	Luce Spia
TE	Termostato lavoro
TS	Termostato sicurezza

SP 020 P

SP 020 P

MODEL

SPIDOGLOSS SP020P

- | | |
|--------------------------------|---------------------------------|
| • Black smooth surfaces | • Max. temperature 400°C |
| • Manual Control | • Glass ceramic |



DESCRIPTION

Professional Contact Cooking System with Glass Ceramic plates, suitable for cooking a wide array of different foods, as such: toast, sandwich, meat, fish, vegetables, eggs, etc. High quality cooking result thanks to heat distribution uniformity and use of shock resistance, non-stick, non-porous and impermeable to smells and tastes Glass Ceramic Cooking Surfaces.

High versatility of use thanks to **SHB™ Plus** technology which allows combined heating (contact + infrared) and high cooking Temperature setting.

Up to 60% saving in Preheating Time thanks to **SHB™ Plus**.

Up to 60% saving in Energy consumption thanks to the **Protek.Safe™** high efficiency insulation system which eliminates unnecessary energy loss.

STANDARD COOKING FEATURES

SETTINGS:

- Manual Control
- Temperature set: 120 °C – 400 °C.

STANDARD TECHNICAL FEATURES

- **Double Black Smooth Glass Ceramic cooking plate:**
2 250x250 mm.
- Stainless Steel Case
- Ergonomic Handle
- Self-looking Handle Bracket
- 4 Non-Slip Feets
- Removable Dip Tray
- ON/OFF button and LED light


ACCESSORIES

- **METAL SCRAPER**
Metallic scraper for Glass Ceramic Surfaces (included)
- **SPIDO CLEAN SPRAY DETERGENT**
750 ml Spray Detergent for Glass Ceramic and Steel Surfaces (to be purchased separately)



SP 020 P

Views
Connection positions
Dimensions and Weights
Installation requirements
Power supply

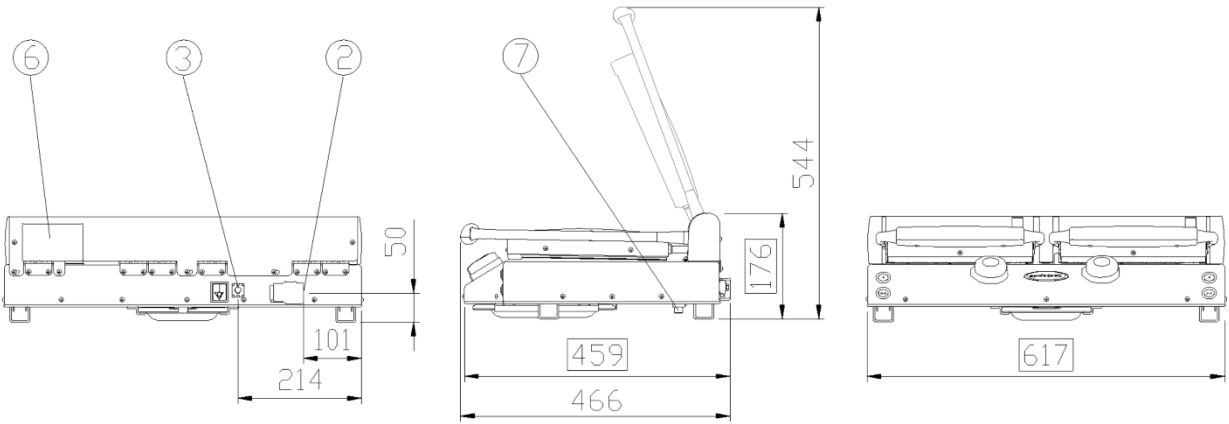

CONNECTION POSITIONS

2	Terminal board power supply
3	Unipotential terminal
6	Technical data plate
7	Safety thermostat

INSTALLATION REQUIREMENTS

Installations must conform to all local electrical systems, specifically minimum wire gauge required for field connection, hydraulic and ventilation codes.

DIMENSIONS AND WEIGHT


Width	617 mm
Depth	459 mm
Height	176 mm
Net Weight	17 Kg

POWER SUPPLY

	STANDARD
Voltage	230 V
Phase	1PH+N+PE
Cycle	50-60 Hz
Power	3 kW
Maximum Amp Draw	13 A
Power cable requirement	H07RN-F 3G 1.5 mm ²
Cord diameter	10 mm
Plug	SCHUKO

SP 020 P

Wiring diagrams

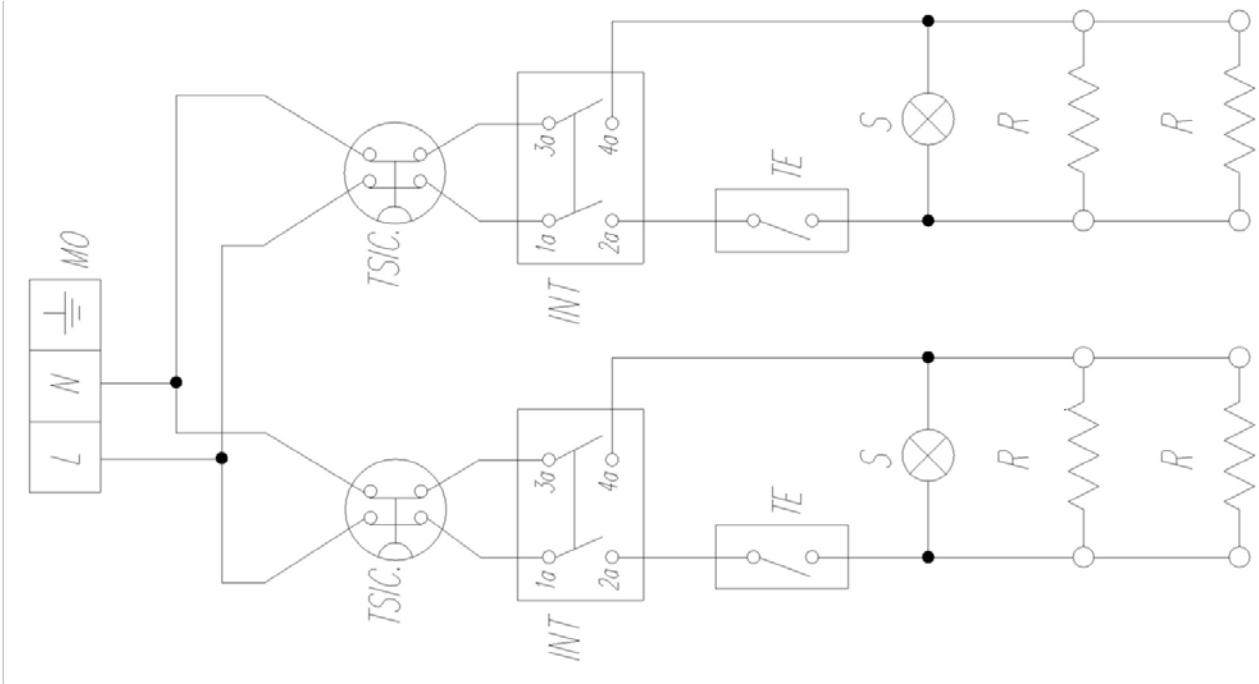

WIRING DIAGRAMS	
INT	Switch
MO	Terminal board
R	Heating element
S	Pilot light
TE	Thermostat
TS	Safety thermostat