

12.4 Bain marie

Baños maría
Bain-marie

72630 Rethermalizer Cayenne® 1/1 GN
Retermalizador Cayenne® 1/1 GN
Appareils remise temp. Cayenne® 1/1 GN

1.000 W
4,3 A
230 V
50/60 Hz

HEAT'N SERVE

IEC Type F (EU) IEC Type G (UK) CE



Without pans
Sin cubetas
Sans bacs

REF	Well depth Profundidad cm		
72630	16,8	EU	1
72550	16,8	UK	1

Thermoset fiber reinforced well — self-insulating with maximum energy efficiency. Capillary Tube Thermostat Control
Recipiente de resina reforzada con fibra termofijada aislante. Máxima eficiencia energética. Control de termostato
Compartiment en résine thermodurcie renforcée – isotherme pour un rendement énergétique maximal. Thermostat à tube capillaire

P15020 Bain-marie 1/1 GN with drain valve
Baño maría 1/1 GN con grifo drenaje
Bain-marie 1/1 GN avec robinet de drainage

+30 °C
+90 °C

WARMER


IEC Type F (EU) CE



Without pans
Sin cubetas
Sans bacs

REF	V	W	Hz	
P15020	230	1.200	50/60	1

Compatible with
Compatible con
Compatible avec

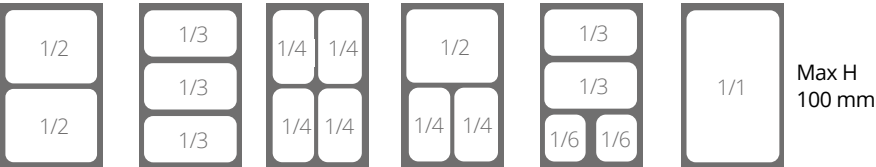

72013 Bain-marie 2/4 GN
Baño maría 2/4 GN
Bain-marie 2/4 GN

IEC Type F (EU) IEC Type G (UK) CE



REF	V	W	A		Hz	
72013CE	230	500	2,2	EU	50/60	1
72013CE-UK	230	500	2,2	UK	50/60	1

Compatible with
Compatible con
Compatible avec

