

CEEC-100-CC		CEEC-100-EF-CC	
CEEC-130-CC		CEEC-130-EF-CC	
CEEC-150-CC		CEEC-150-EF-CC	

CEET-100-CC		CEET-100-EF-CC	
CEET-130-CC		CEET-130-EF-CC	
CEET-150-CC		CEET-150-EF-CC	

ref.	largo length (mm)	exposición display (m²)	potencia frig. frig power (W)	consumo consumption (W)	peso neto net weight (Kg)	tensión monofásica single phase voltage	refrigerante coolant	rango range
CEEC / CEET-100	1055	0,65	606	650	136	230 V - 50 Hz	R-404A	+2°C+6°C
CEEC / CEET-130	1305	0,80	780	850	154	230 V - 50 Hz	R-404A	+2°C+6°C
CEEC / CEET-150	1525	0,95	780	850	188	230 V - 50 Hz	R-404A	+2°C+6°C
CEEC / CEET-100-EF	1055	0,65	606	650	136	230 V - 50 Hz	R-404A	-1°C+1°C
CEEC / CEET-130-EF	1305	0,80	780	850	154	230 V - 50 Hz	R-404A	-1°C+1°C
CEEC / CEET-150-EF	1525	0,95	780	850	188	230 V - 50 Hz	R-404A	-1°C+1°C

DISPLAYS AND BUFFETS • VITRINAS EXPOSITORAS Y BUFFETES



características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications without prior notice

- Exterior en acero inox AISI-304 18/10
  - Interior en acero inox AISI-304 18/10
  - Cristal frontal templado, abatible
  - Bastidor sobre ruedas, 2 de ellas con freno
  - Perfilera de aluminio anodizado
  - Puertas correderas plexi incluidas
  - Unidad +condensadora ventilada
  - Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
  - Control digital de temperatura y descarches, eficiente en la gestión del consumo de energía
  - Temperatura de trabajo a 32°C ambiente
- CEEC / CEET-EF evaporador estático + placa fría  
CEEC / CEET evaporador estático

- AISI-304 18/10 stainless steel exterior
  - AISI-304 18/10 stainless steel interior
  - Toughened curved glass hinges forward
  - Chassis with wheels, 2 with brake
  - Anodized aluminium profiles
  - Plexi sliding doors included
  - Fan assisted condenser unit
  - 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
  - Energy efficient digital controller of temperature and defrosts
  - Operating temperature 32°C ambient
- CEEC / CEET-EF static evaporator + cool plate  
CEEC / CEET static evaporator

230v 60Hz / 115v 60Hz consultar - consult

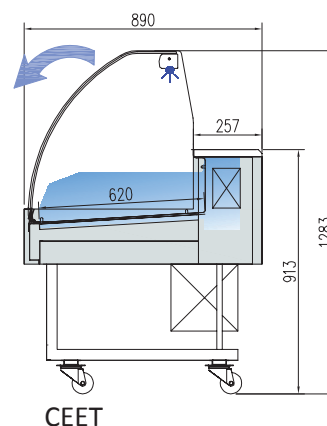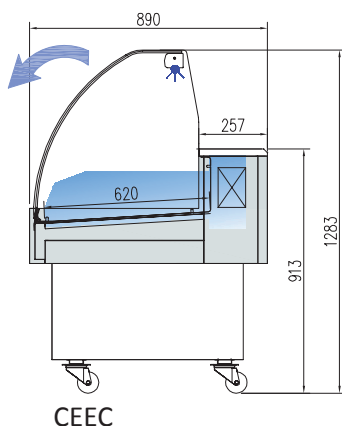



all photos must be considered as a reference - fotografías no contractuales



CEET-150-EF-CC



CEEC-150-CC